

Image shown above 21.3 with round canopy

| | |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Series | 21 |
| Mounting | Ceiling mounted |
| Glass Colour | White |
| Lamp | 1W LED, 2700K, 100lm (2500K and 3000K options available) 20W Xenon, 2600K, 196lm |
| Coaxial Length | 3000mm standard / up to 30500mm maximum Adjustable length: 21.1 - 21.7 Non-adjustable length: 21.11 - 21.50 |
| Canopy Finish | 21.1 - 21.7: white, black or brushed nickel canopy 21.1m: white, black, brushed nickel, or brushed brass canopy 21.11 - 21.50: white canopy |
| Material | Porcelain, blown borosilicate glass, braided metal coaxial cable, electrical components, steel canopy |
| Power Supply | Integral Remote mounted for 21.1m Bocci recommends remote mounting power supplies for ease of long-term maintenance. |
| Environment | Indoor, dry location. IP30 |
| Note | Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research. |
| Patent # | Worldwide patents issued and pending. |
| Certifications | |



CB

C

CE

UK

CA



Weight (kg)



Round

| | |
|-------|------|
| 21.1 | 0.5 |
| 21.3 | 1.8 |
| 21.5 | 3 |
| 21.7 | 4.1 |
| 21.14 | 17.7 |
| 21.26 | 25 |
| 21.36 | 28 |
| 21.37 | 26.8 |



Square

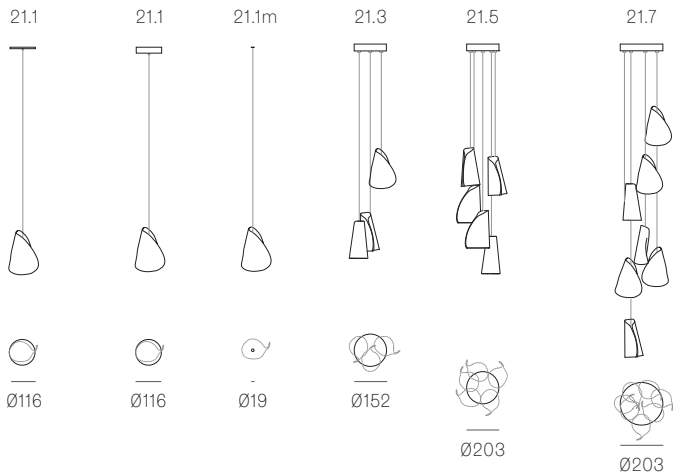
| | |
|-------|------|
| 21.11 | 16.1 |
| 21.36 | 32.5 |
| 21.50 | 37.3 |



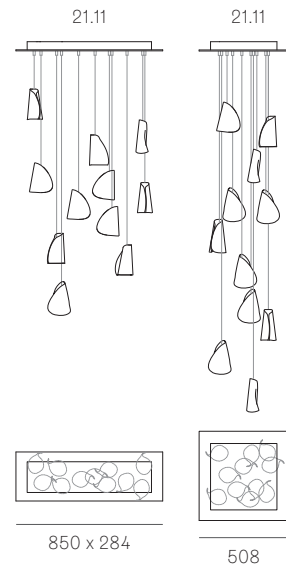
Rectangle

| | |
|-------|------|
| 21.11 | 16.1 |
| 21.14 | 17.7 |
| 21.21 | 18.6 |
| 21.26 | 25 |
| 21.36 | 28.4 |

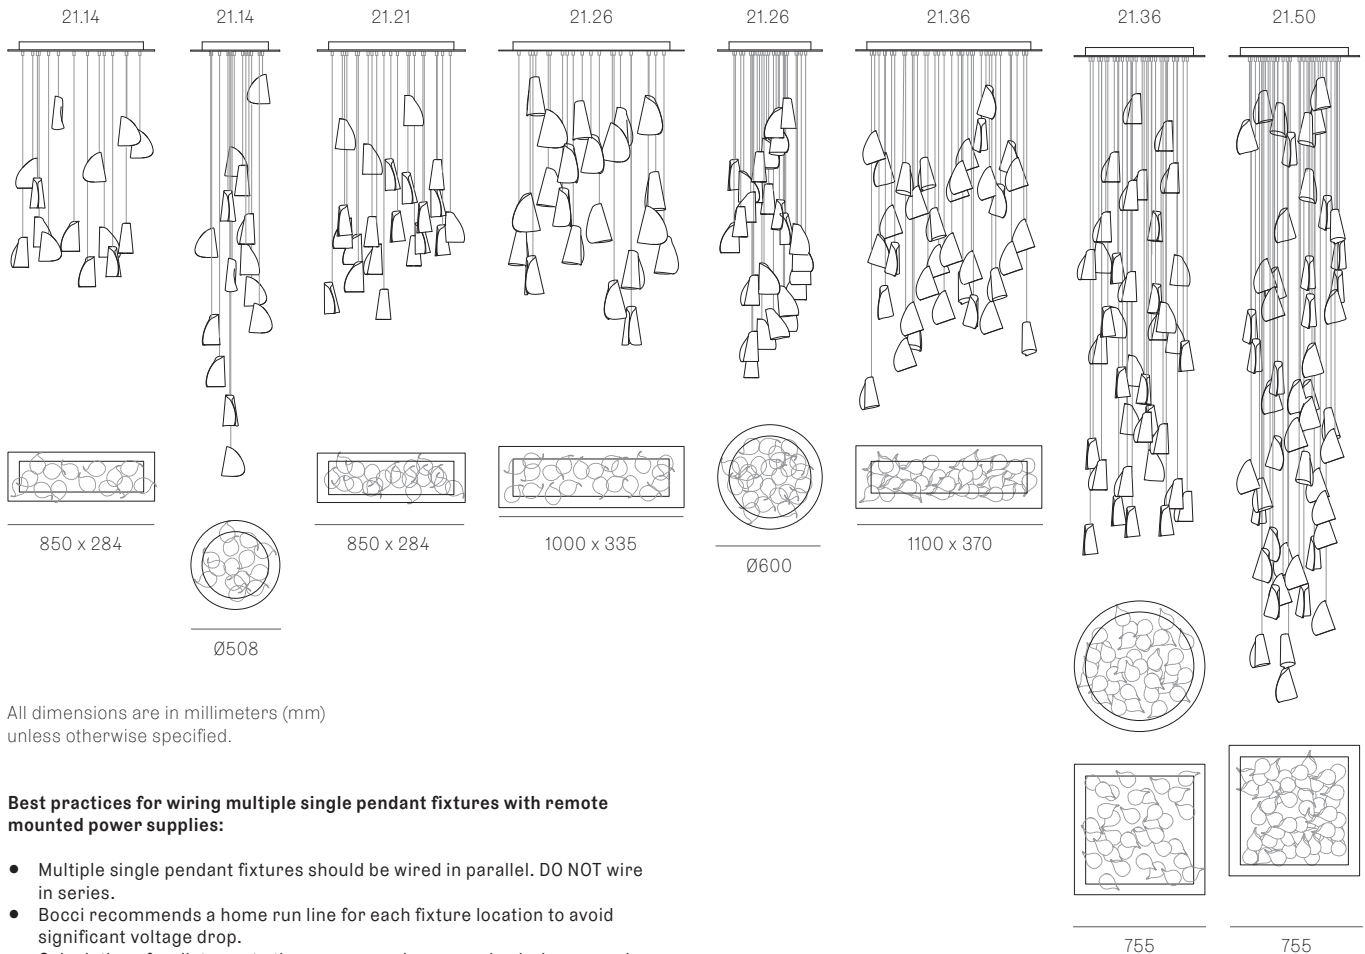
ADJUSTABLE LENGTH



NON-ADJUSTABLE LENGTH

up to 3000
standardup to 30500
custom

NON-ADJUSTABLE LENGTH

up to 3000
standardup to 30500
custom

All dimensions are in millimeters (mm)
unless otherwise specified.

**Best practices for wiring multiple single pendant fixtures with remote
mounted power supplies:**

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.