







Image shown above 87.11 with square canopy with pendant anchor kit

± 115 - 240mm


Series	87
Mounting	Ceiling mounted
Glass Colour	Clear
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available) 10W Xenon, 2600K, 81lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 87.1 - 87.7 Non-adjustable Length: 87.11 - 87.36
Anchor Finishes	White, black, brass, brushed nickel
Canopy Finishes	87.1 - 87.7: white, black or brushed nickel canopy 87.1m: white, black, brushed nickel, or brushed brass canopy 87.11 - 87.36: white canopy
Materials	Blown glass, copper mesh, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 87.1m  Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US Patent pending EU 03611144 - 0005-0009
Certifications	    

Weight (kg)




Round

87.1	1.4
87.3	4.1
87.5	6.8
87.7	9.5
87.14	30.5
87.26	48.2
87.36	64.1



Square


87.11	25.5
87.26	50.5
87.36	68.6




Rectangle

87.11	25.5
87.14	30.9
87.20	40.9
87.26	45.9
87.36	64.5

## ADJUSTABLE LENGTH

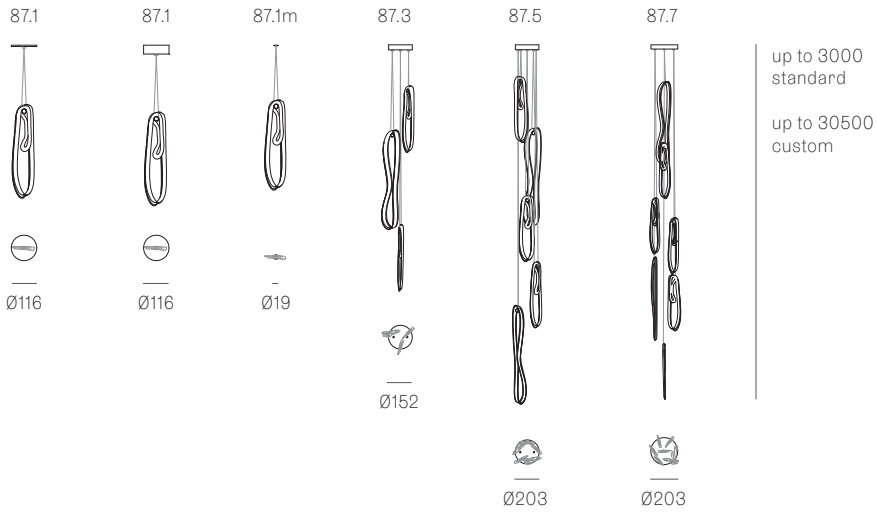

## NON-ADJUSTABLE LENGTH

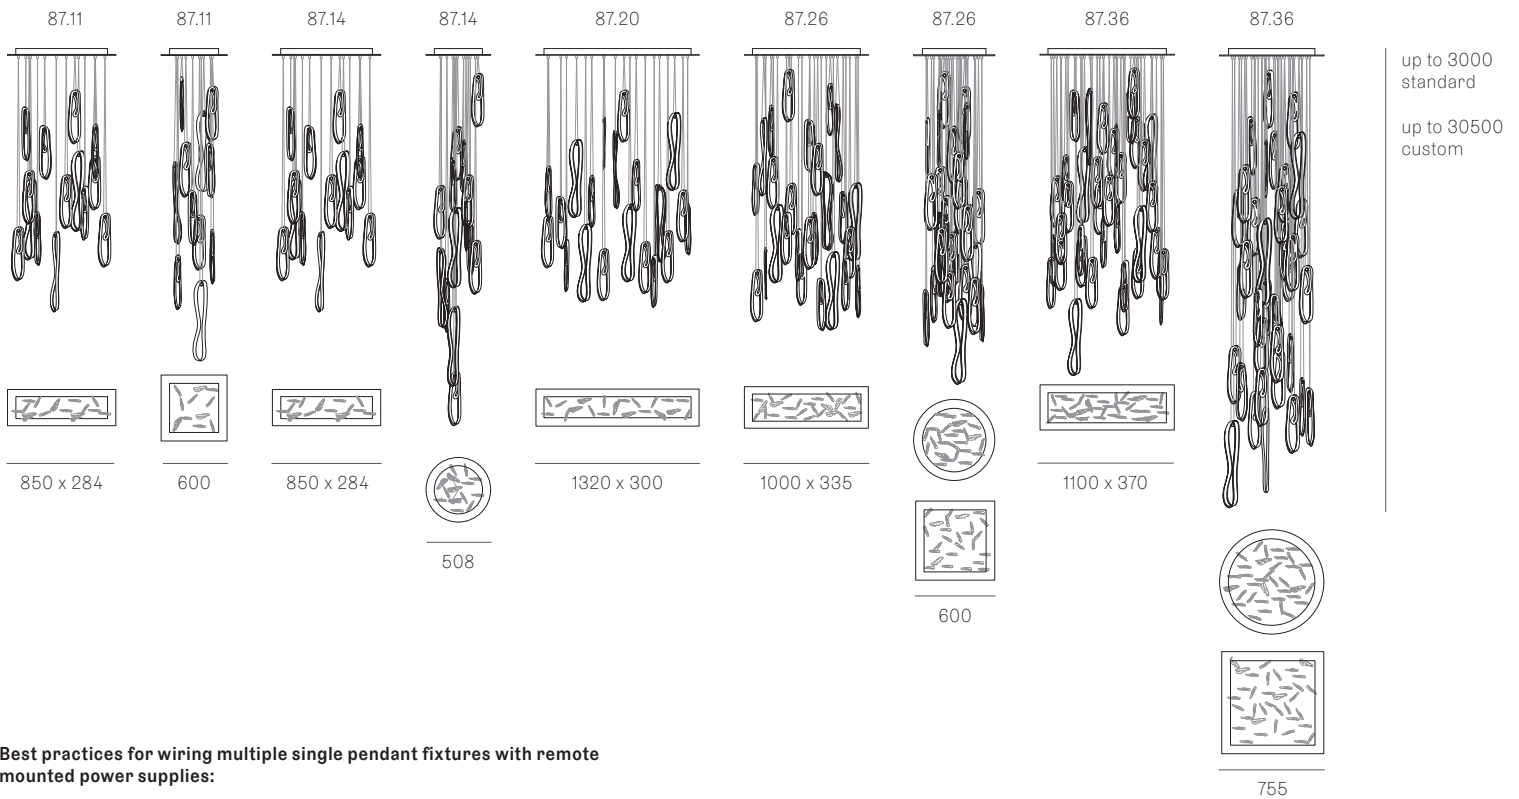


## Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:


- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.

## ADJUSTABLE LENGTH

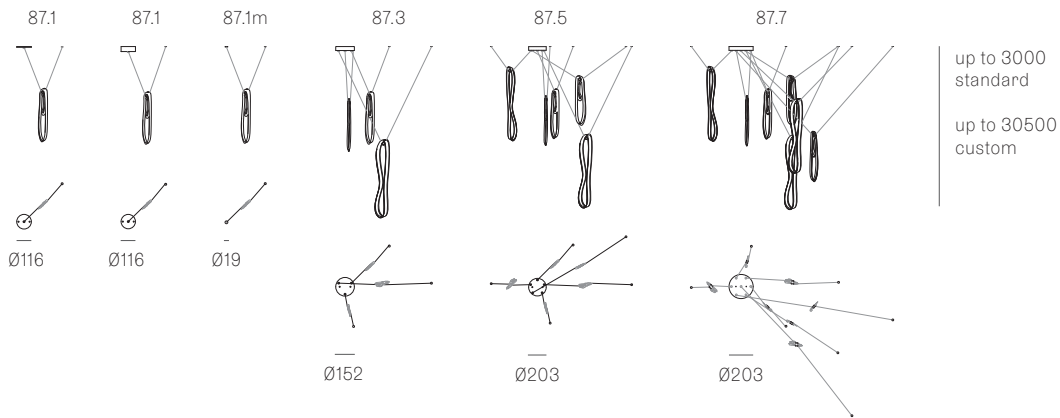

## NON-ADJUSTABLE LENGTH



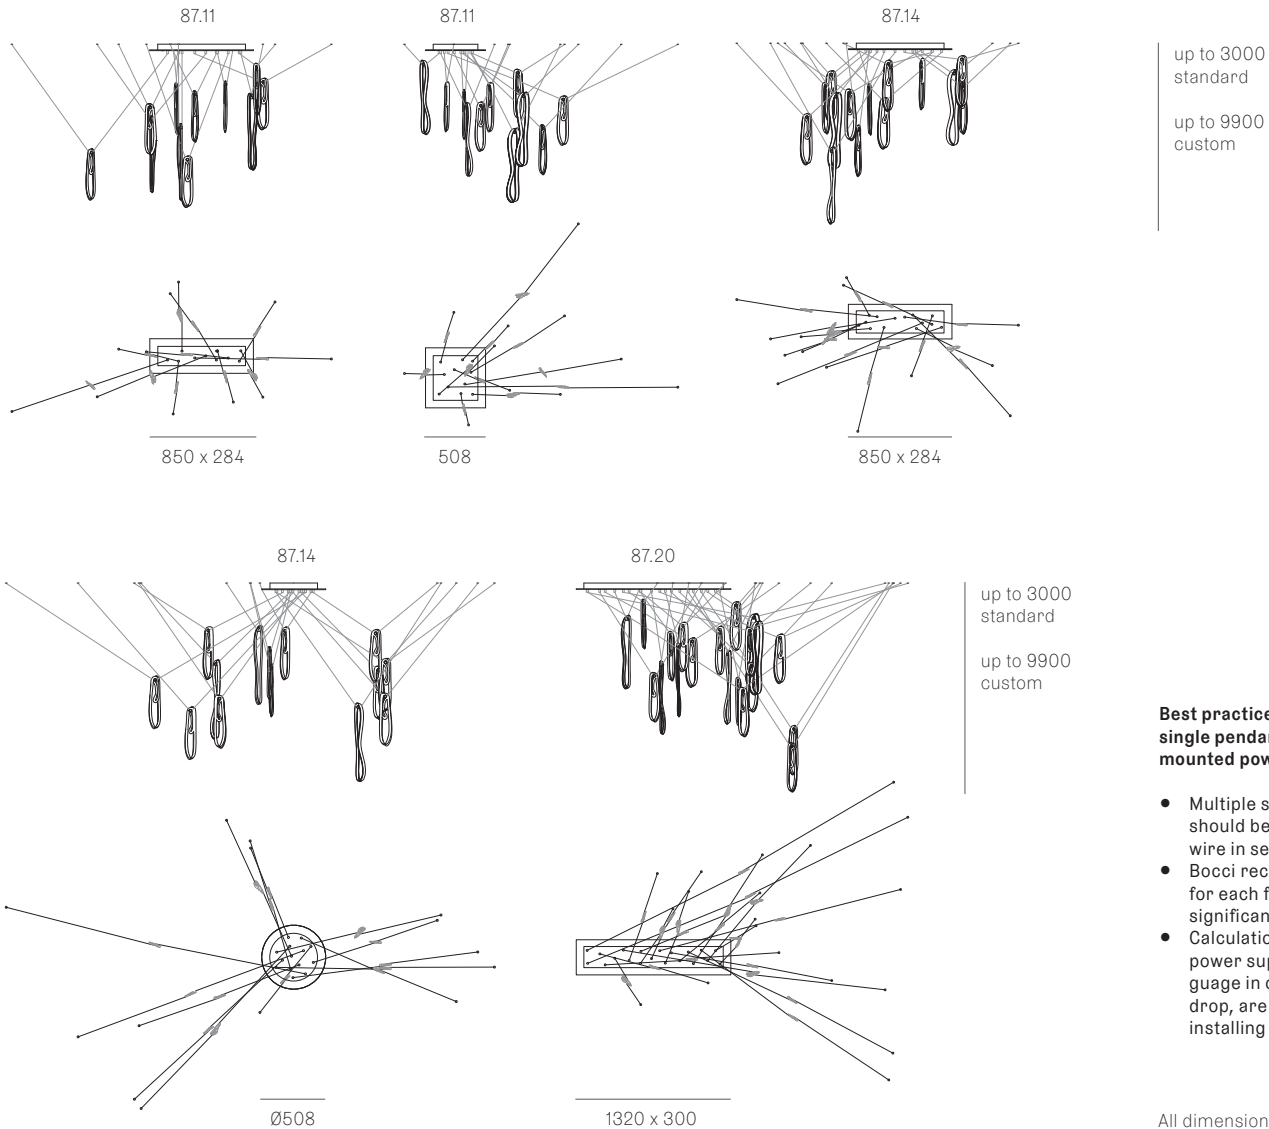


**Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:**






- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.




## NON-ADJUSTABLE LENGTH

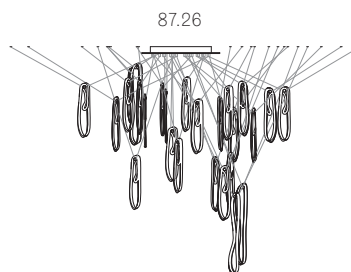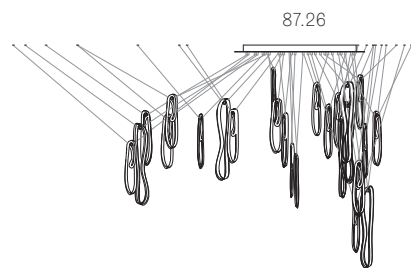

up to 3000  
standard  
up to 30500  
custom

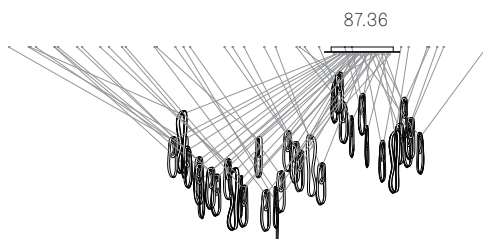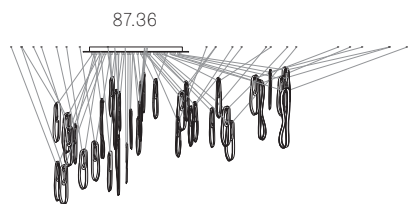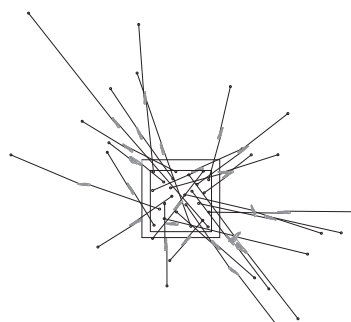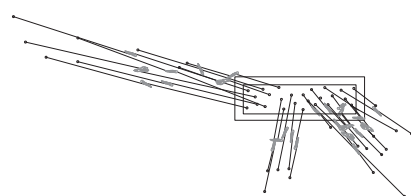

up to 3000  
standard  
up to 9900  
custom

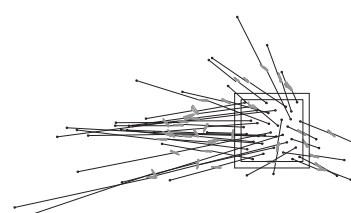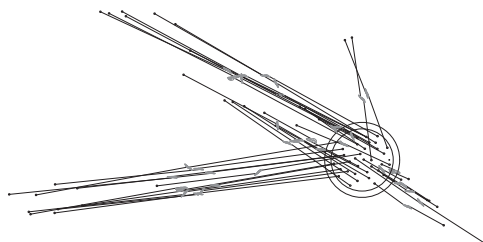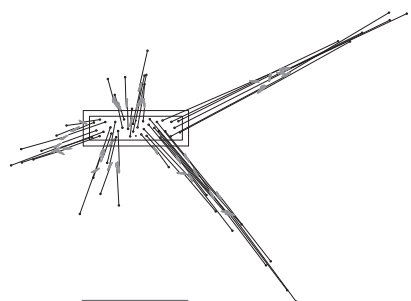

All dimensions are in millimeters (mm)  
unless otherwise specified.