

Image shown above 38.8Va.2, 500mm extender

Ø190 - 215mm

Mounting	Ceiling mounted
Glass Colour	Clear
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available)
Extenders	Available in 150mm, 250mm, 500mm, 1200mm, 750mm (attached with 2 pendants). Up to 2500mm drop
Finish	Black powder coated
Materials	Blown glass, black powder coated stainless steel armature, electrical components, matte black canopy
Power Supply	Integral Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP20
Note	Optional levelling pendant anchor kit included. Every single Bocci product is handmade. They are blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	EU 002071019-001
Certifications	






Weight (kg)	
38.5Va.1	14.1
38.8Va.1	21.9
38.8Va.2	23.6
38.9Va.1	26.1
38.9Va.2	24.2
38.11Va.1	32.6
38.11Va.2	30.6
38.13Va.1	36.1
38.17Va.1	46.2
38.20Va.1	57.5
38.23Va.1	65.1
38.33Va.1	91.8




Each product is unique, there may be a variance in the weight up to 10%.

38.5VA.1

All dimensions are in millimeters (mm) unless otherwise specified.

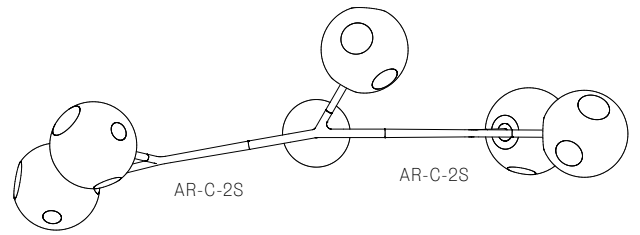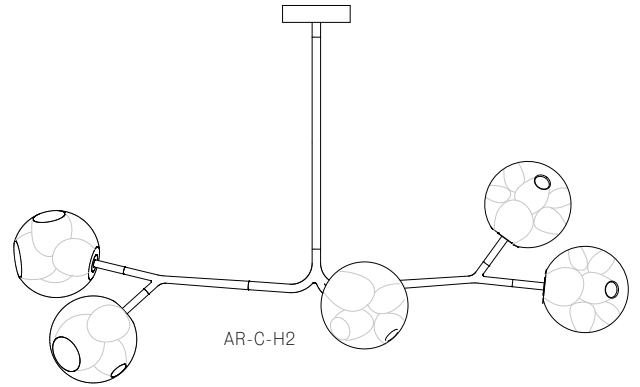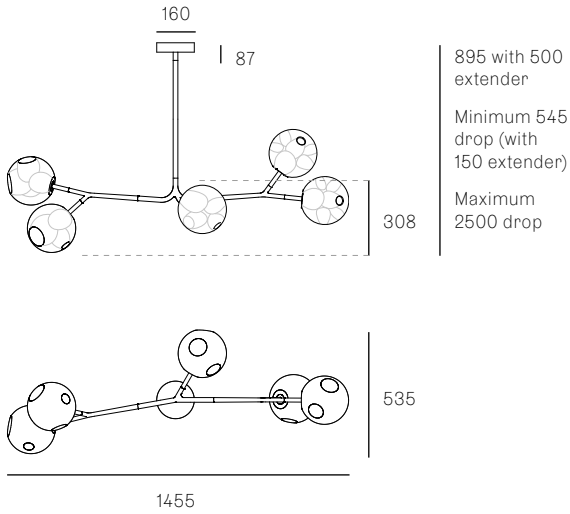


38.8VA.1

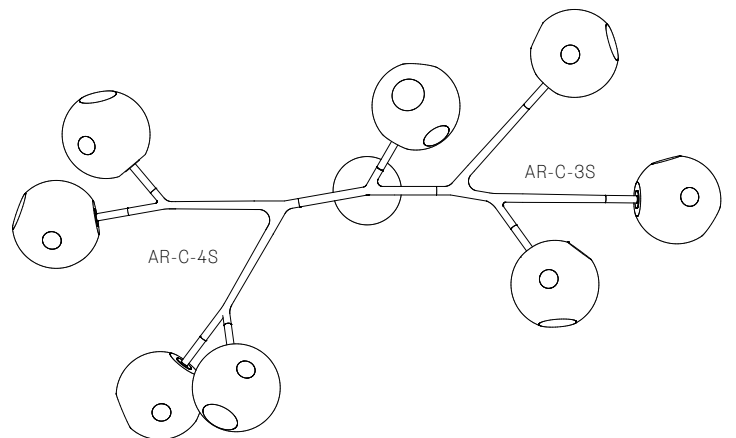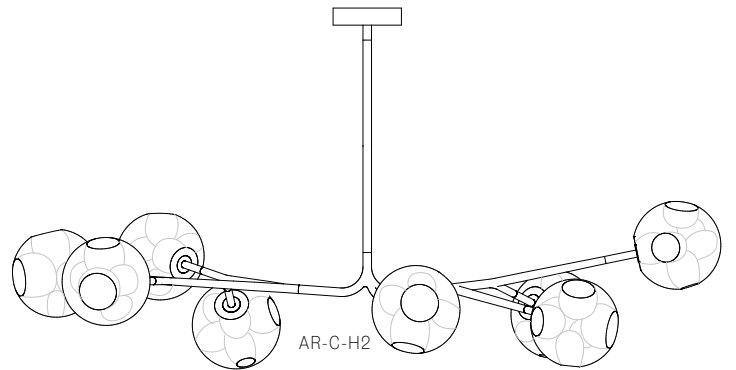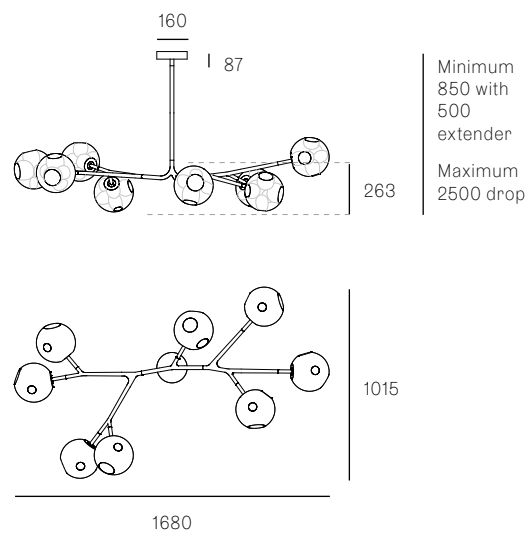




38.8VA.2

All dimensions are in millimeters (mm) unless otherwise specified.

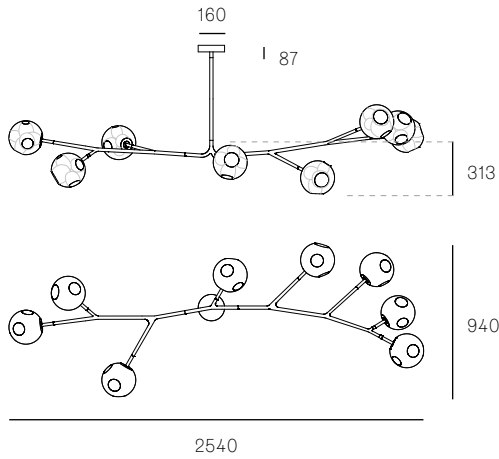


Minimum
900
with 500
extender

Maximum
2500 drop

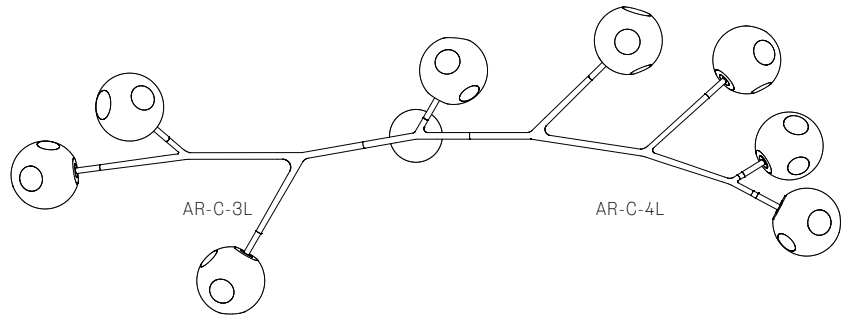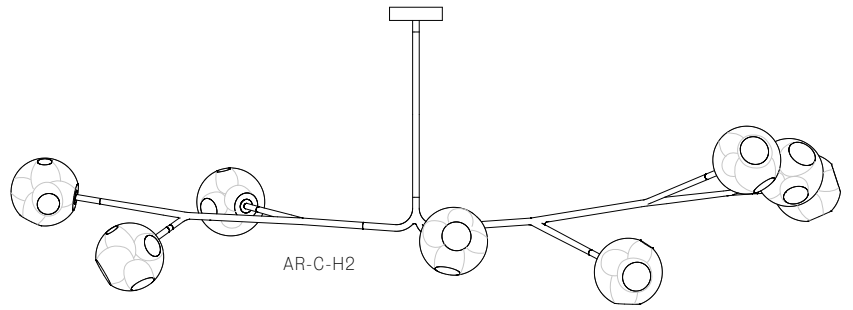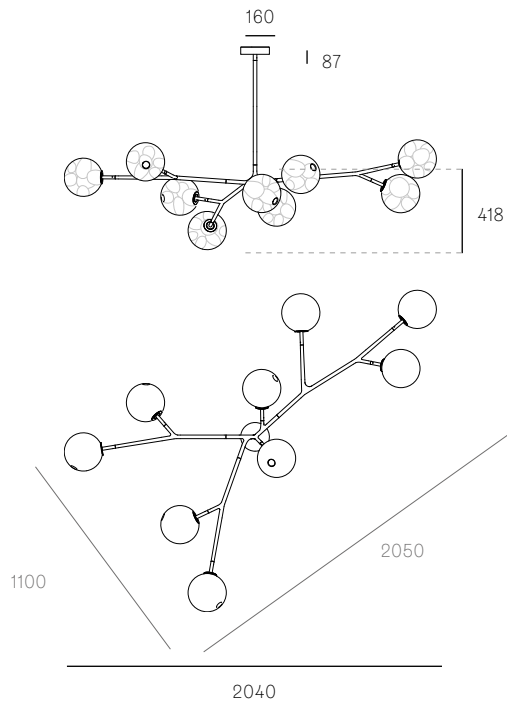**38.9VA.1**



Minimum
1005
with 500
extender

Maximum
2500 drop


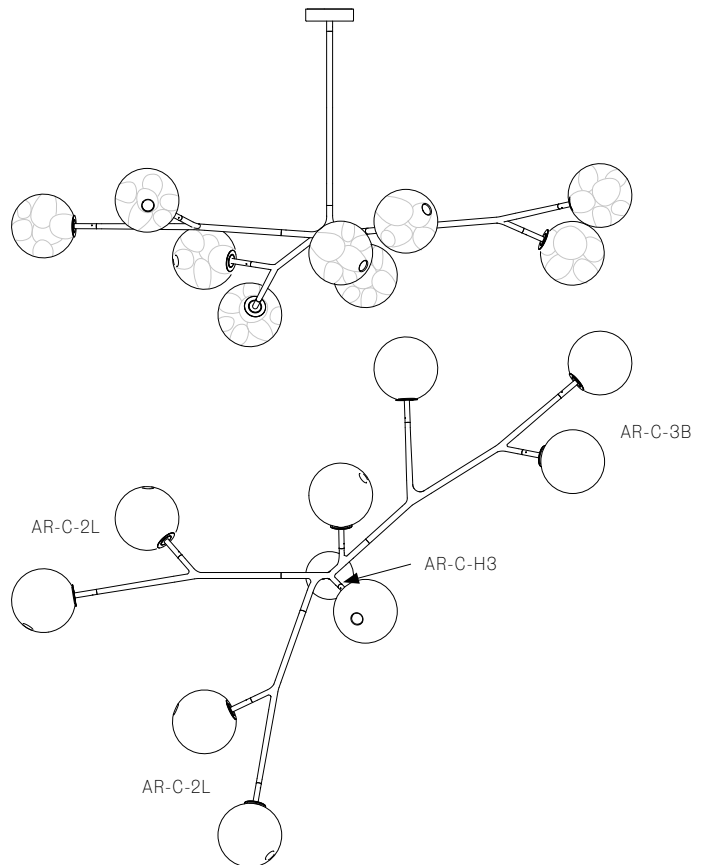


38.9VA.2

All dimensions are in millimeters (mm) unless otherwise specified.





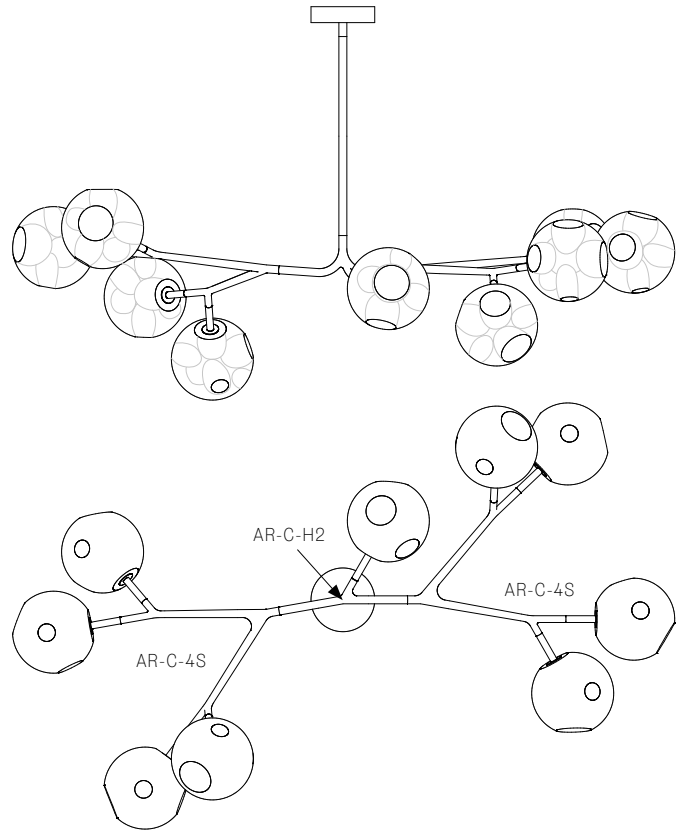
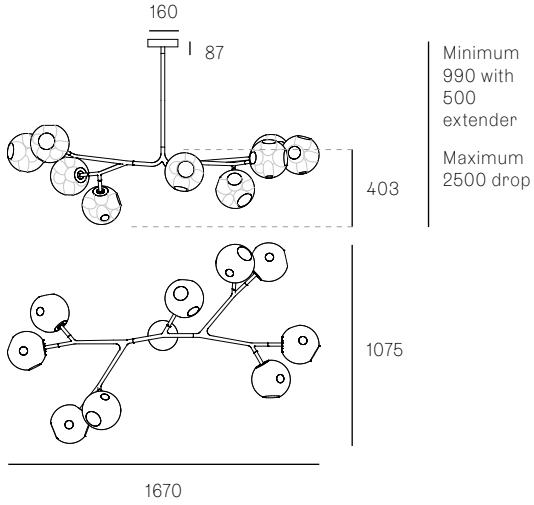


38.11VA.1

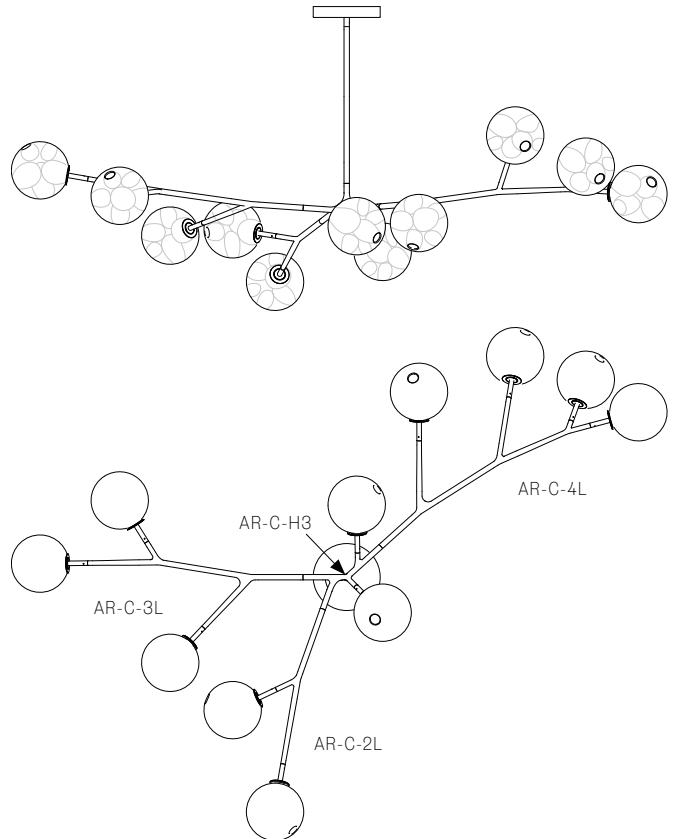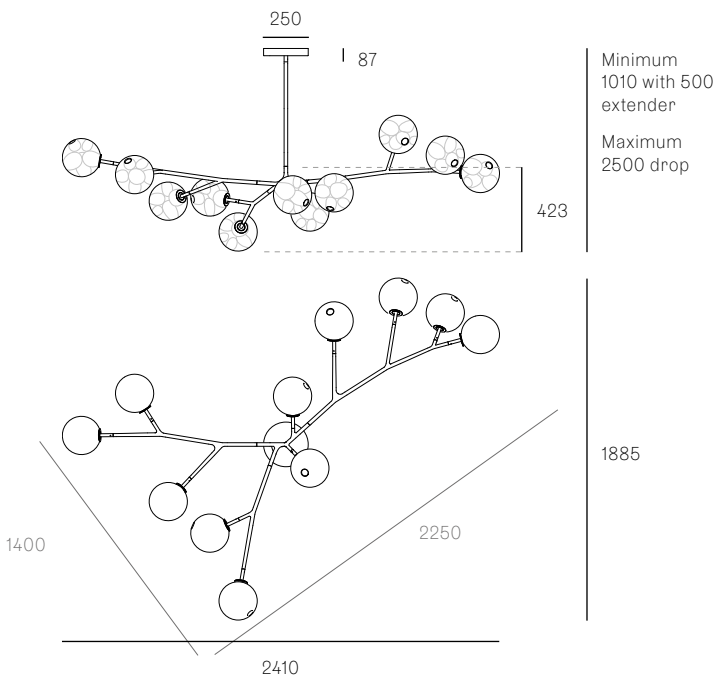



38.11VA.2

All dimensions are in millimeters (mm) unless otherwise specified.

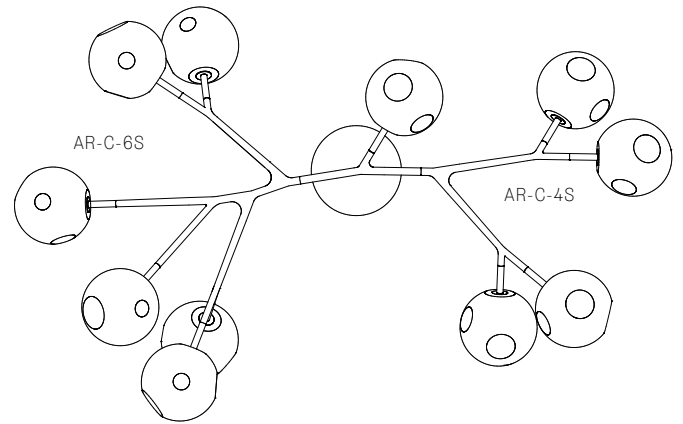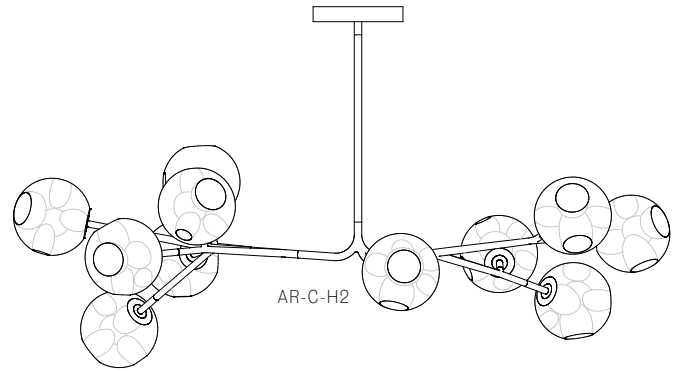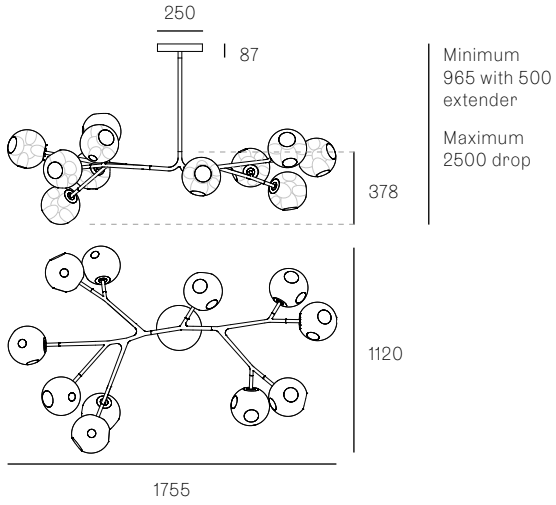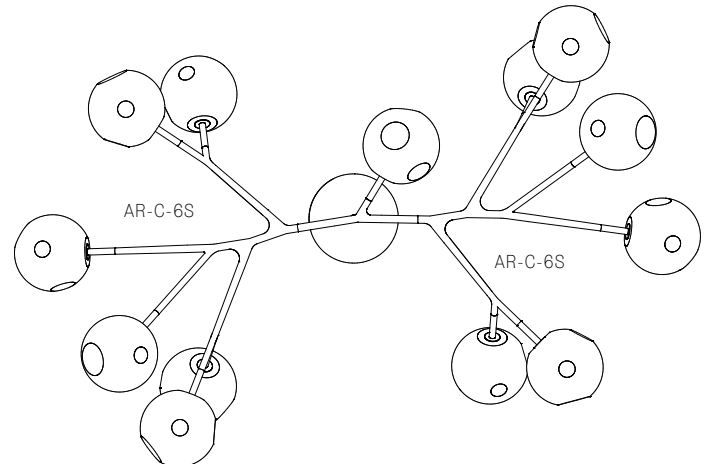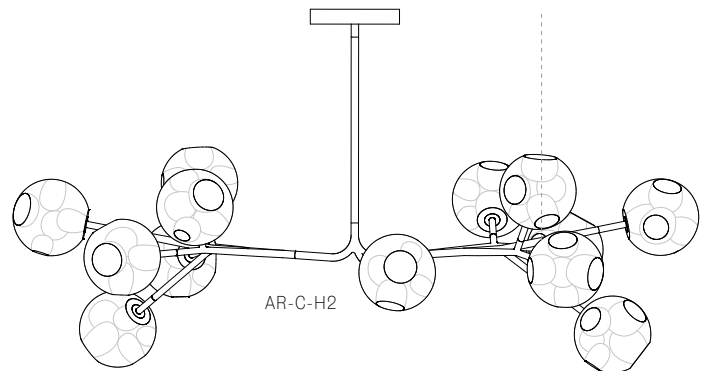
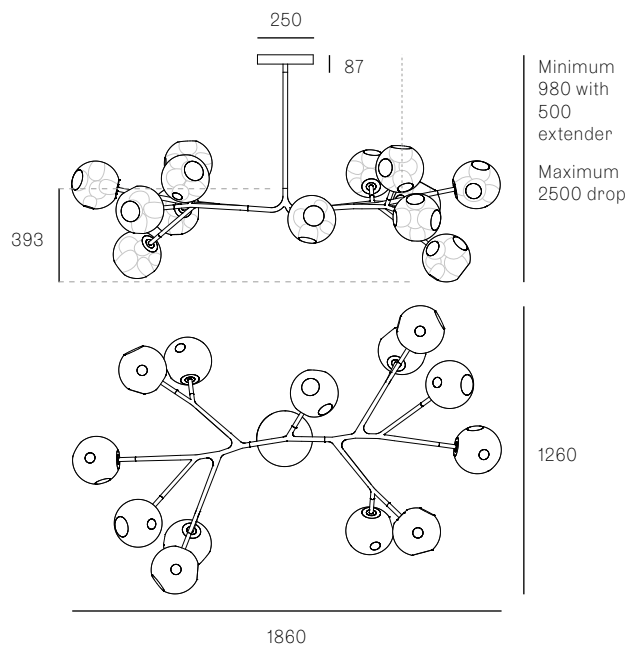
**38.13VA.1**

38.17VA.1

All dimensions are in millimeters (mm) unless otherwise specified.

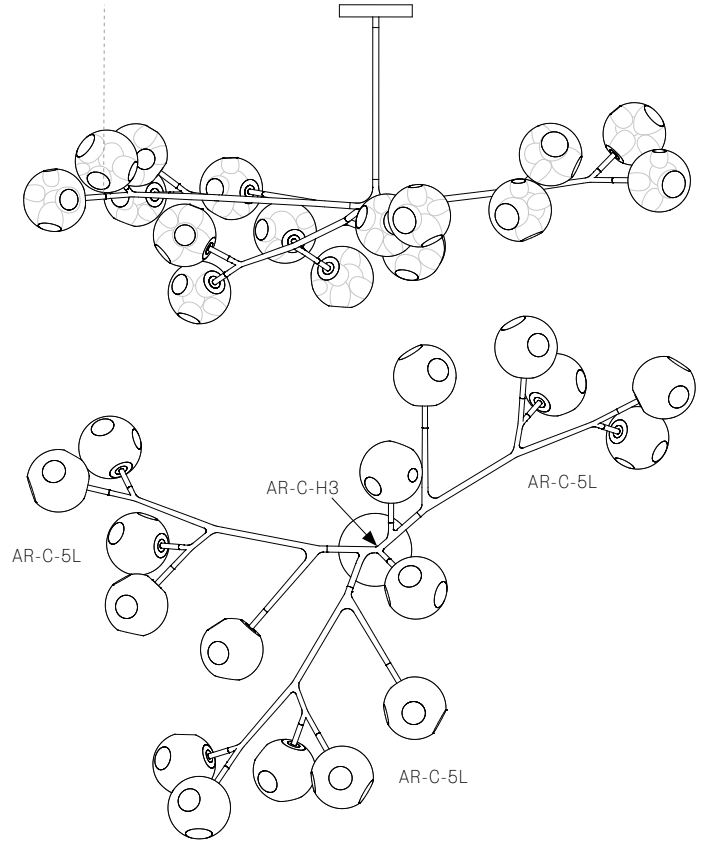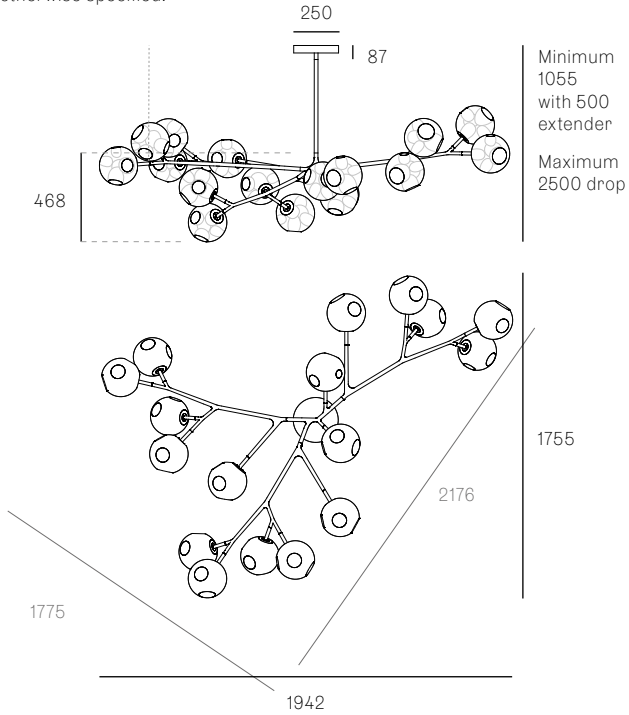


38.20VA.1

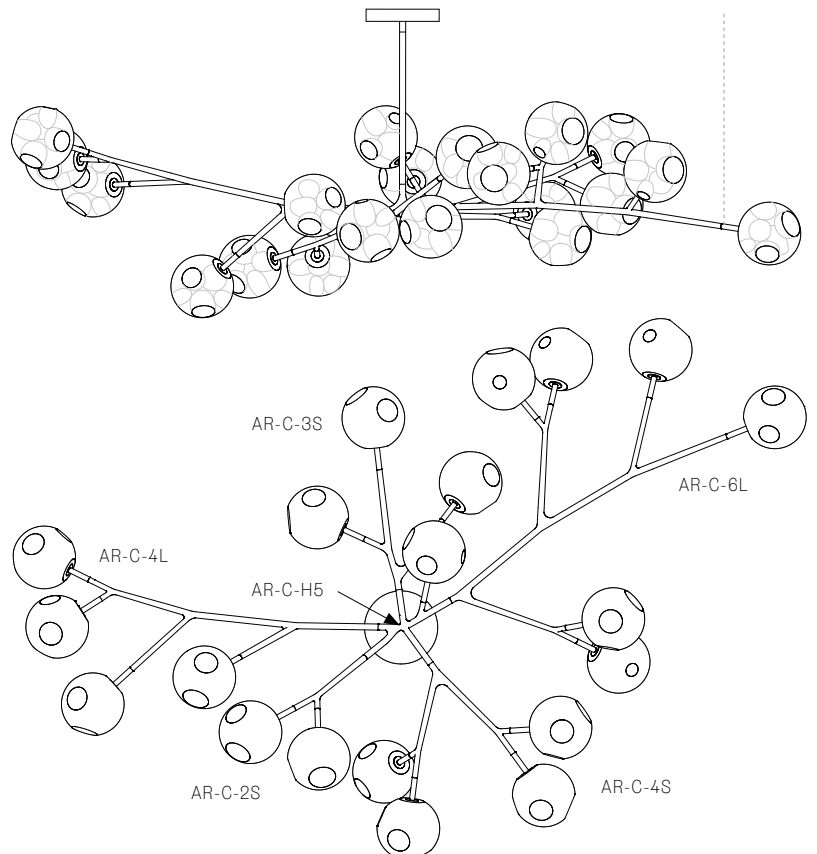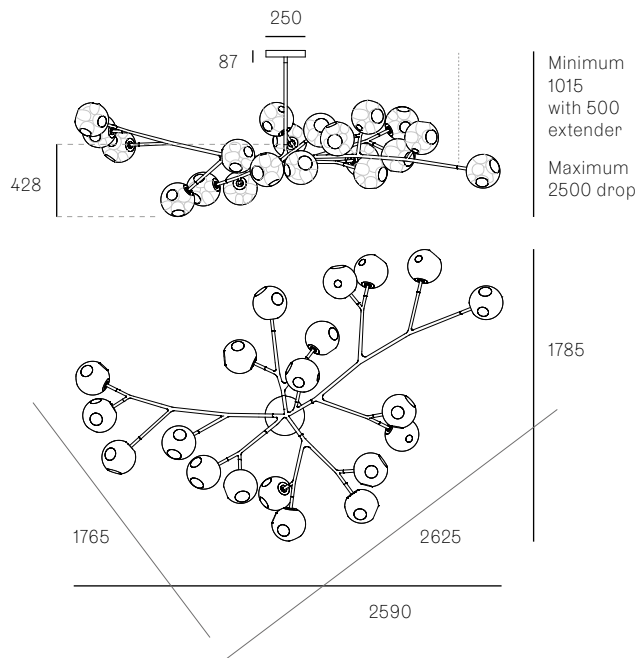


38.23VA.1

All dimensions are in millimeters (mm) unless otherwise specified.

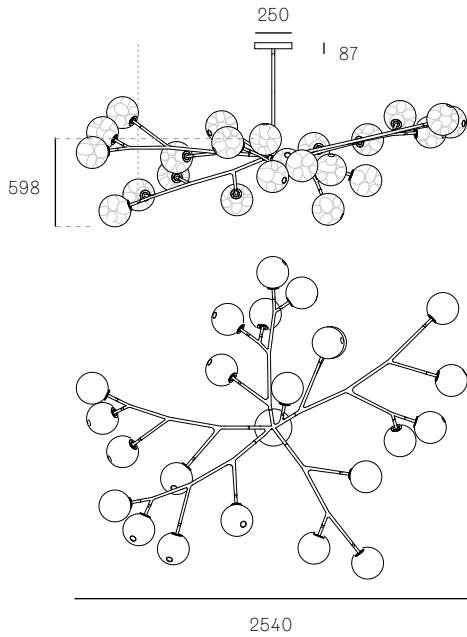


Minimum
1185
with 500
extender
Maximum
2500 drop

2250

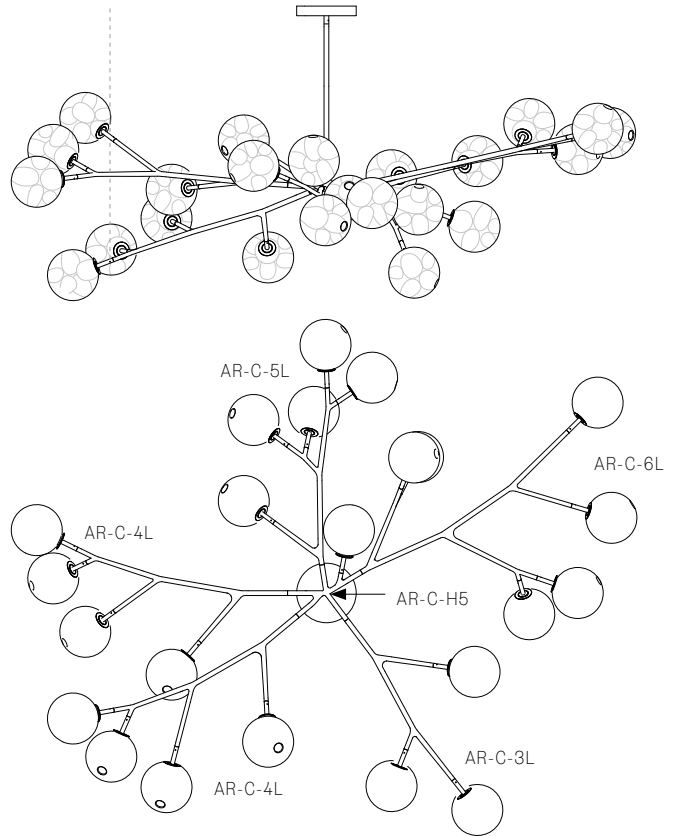

38.33VA.1

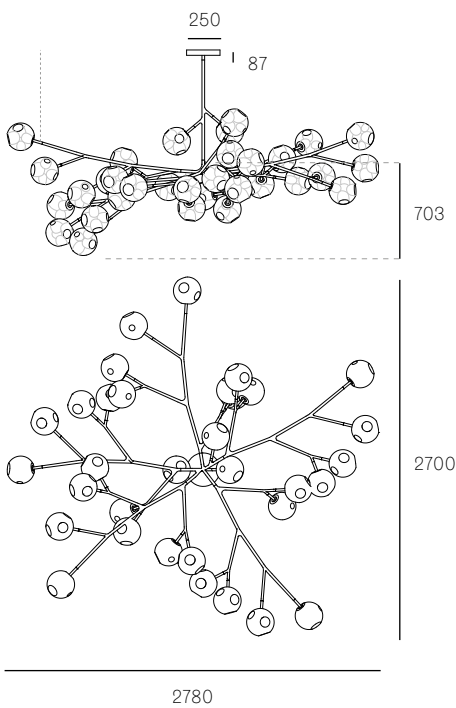

1540
with 750
extender
Maximum
2500 drop

703

2700

