

± 120 -  
150mm

Image shown above 73.11a.1, 500mm extender

± 230 - 380mm

Mounting	Ceiling mounted
Glass Colours	Clear, grey 1, grey 2, grey 3
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available)
Extenders	Available in 150mm, 250mm, 500mm, 1200mm, 750mm (attached with 2 pendants). Up to 2500mm drop
Finish	Black powder coated
Materials	Blown glass, black powder coated stainless steel armature, electrical components, matte black canopy
Power Supply	Integral Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP20
Note	<b>Optional levelling pendant anchor kit included.</b>  Every single Bocci product is handmade. They are blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US D762,323 S EU 002633230-0001 - 0003

Certifications





Weight (kg)

73.5a.1	21.4
73.8a.1	33.6
73.8a.2	35.2
73.9a.1	39.1
73.9a.2	37.3
73.11a.1	48.6
73.11a.2	46.7
73.13a.1	55.1
73.17a.1	70.8
73.20a.1	84.6
73.23a.1	98.5
73.33a.1	132.2



Each product is unique, there may be a variance in the weight up to 10%.

73.5A.1

All dimensions are in millimeters (mm) unless otherwise specified.

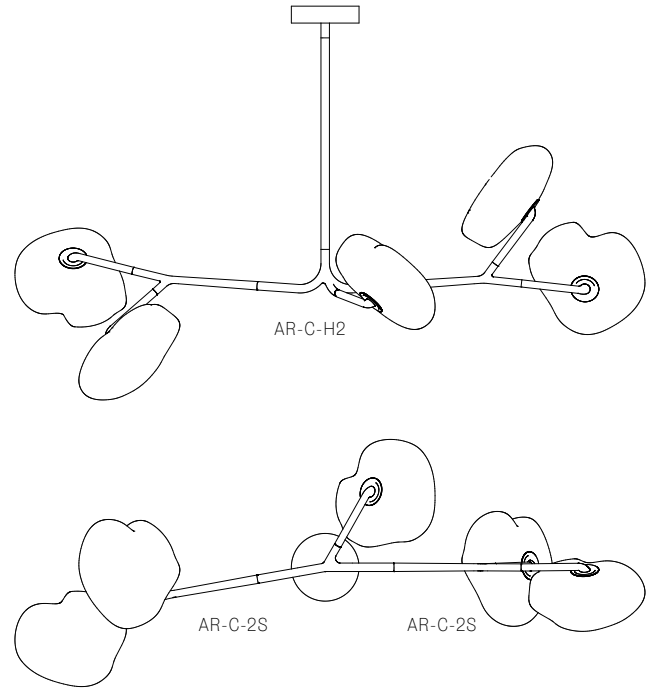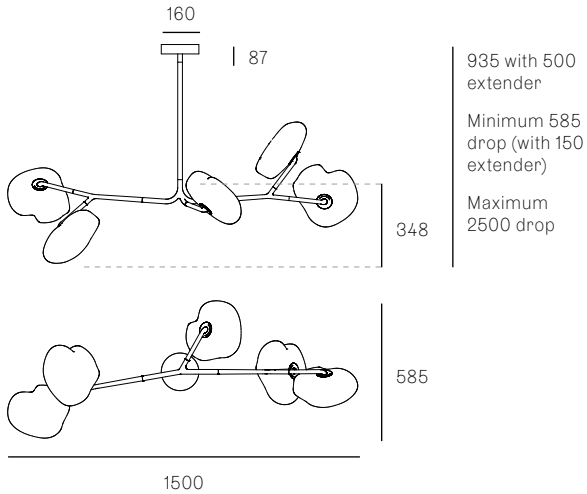


73.8A.1

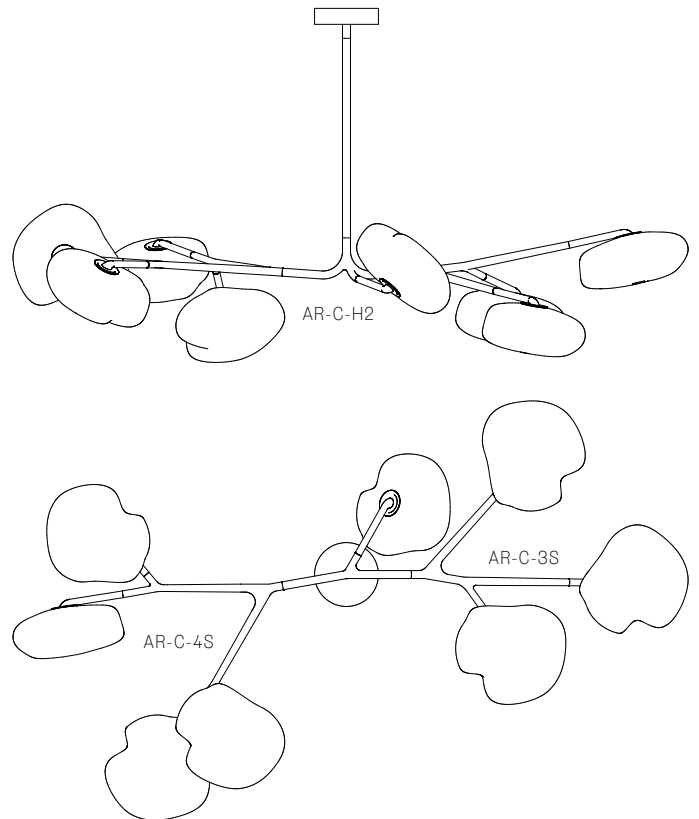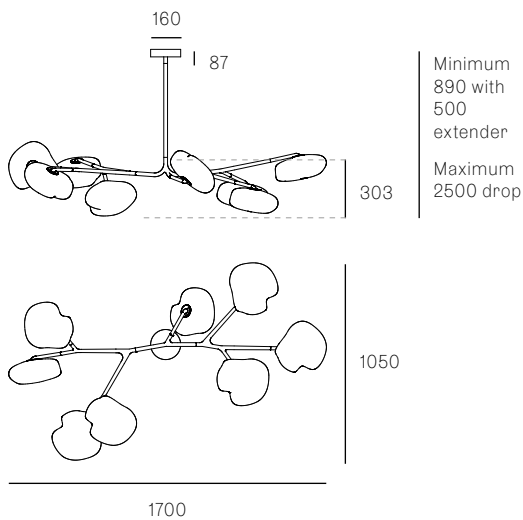


73.8A.2


All dimensions are in millimeters (mm) unless otherwise specified.

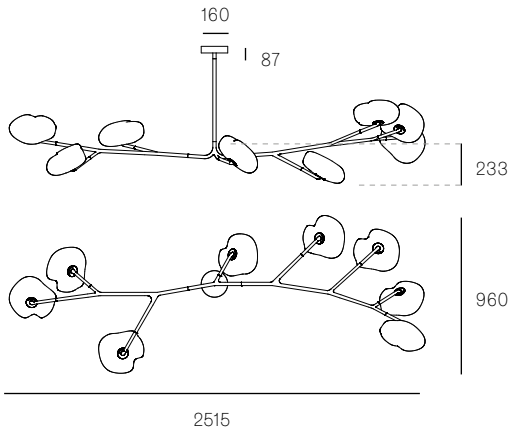


Minimum  
820 with  
500  
extender  
Maximum  
2500 drop

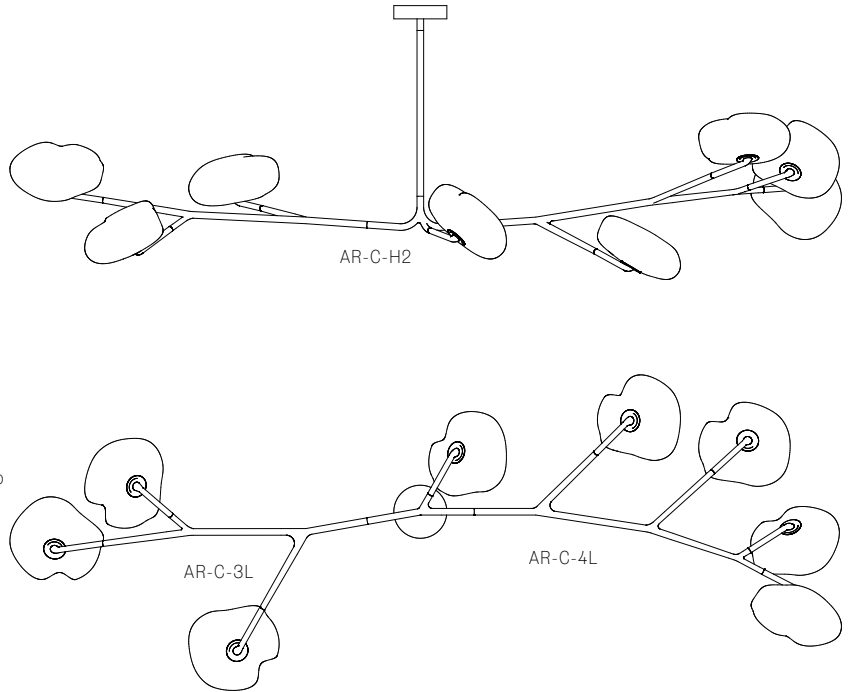

73.9A.1




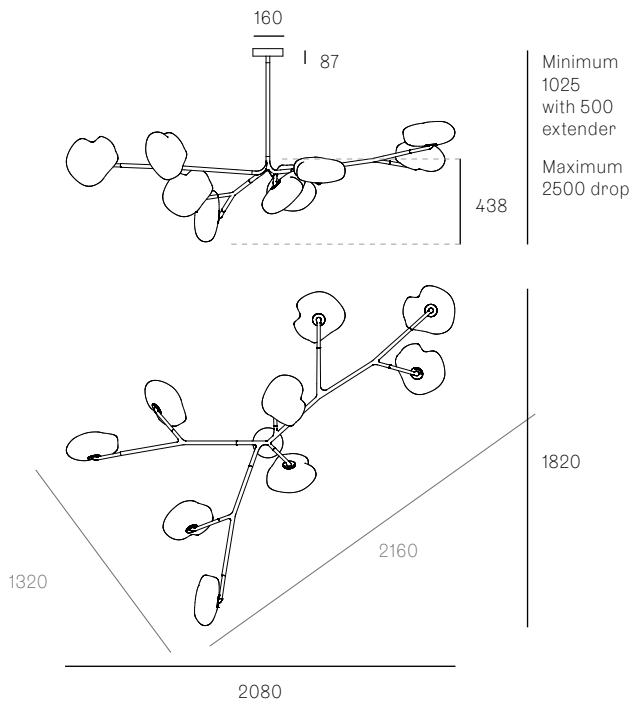


Minimum  
1025  
with 500  
extender  
Maximum  
2500 drop

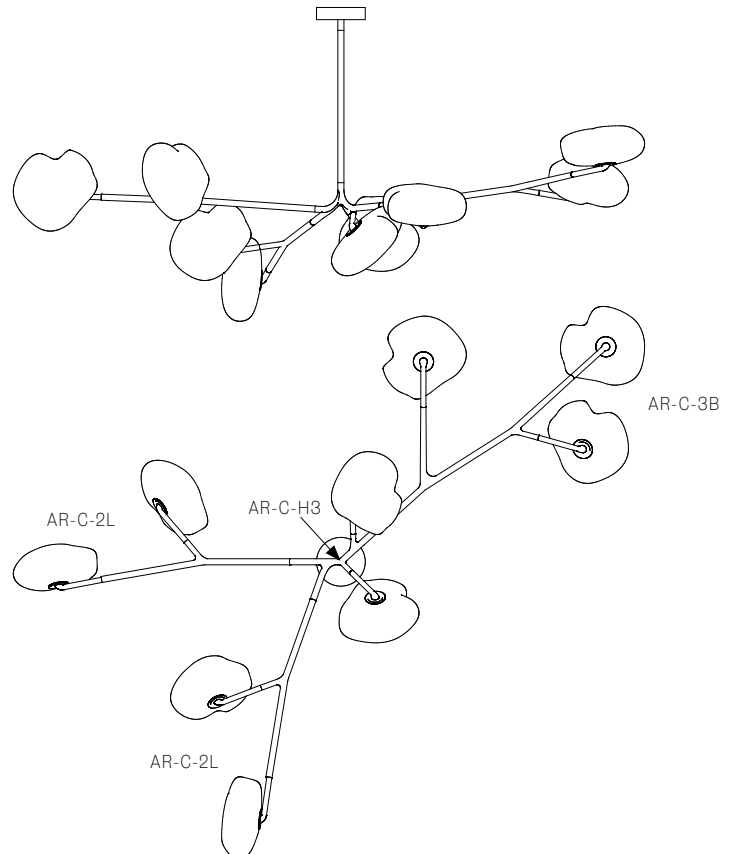



**73.9A.2**

All dimensions are in millimeters (mm) unless otherwise specified.

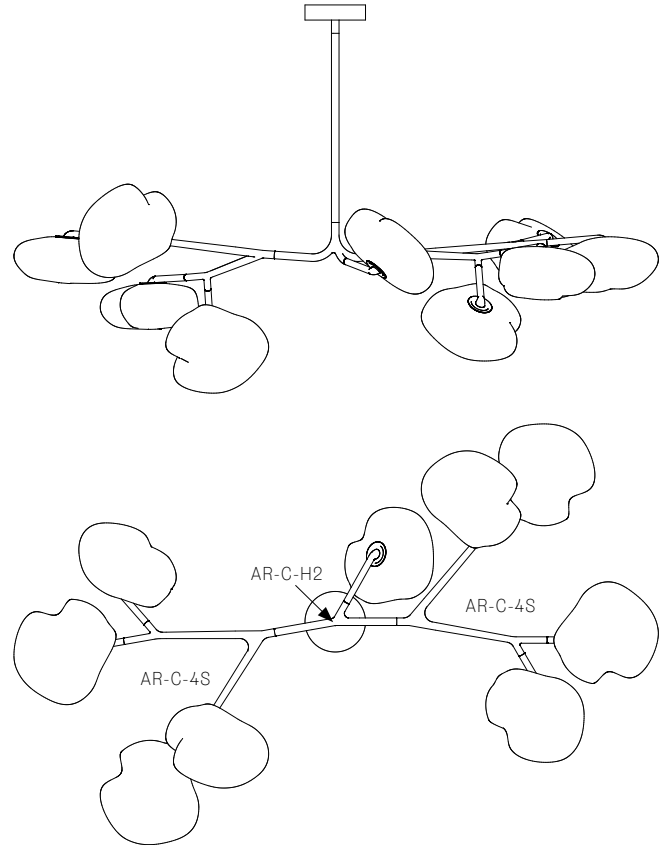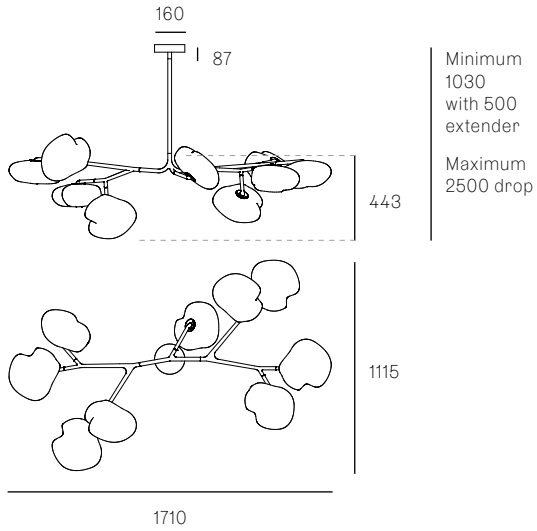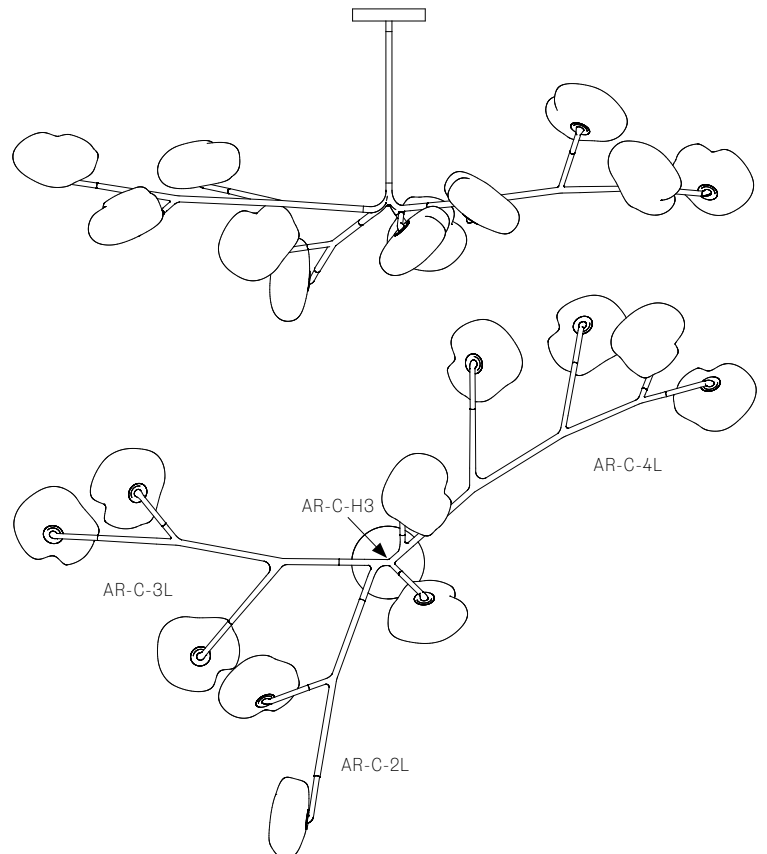
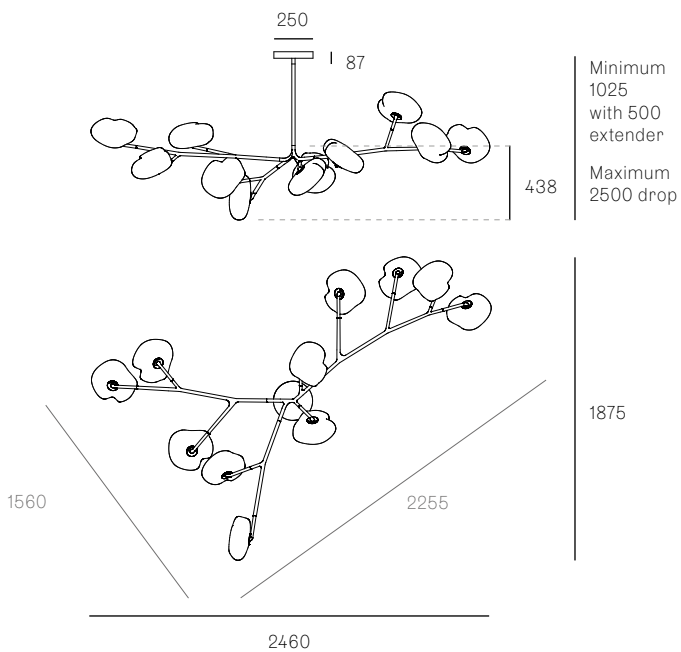
**73.11A.1**

73.11A.2

All dimensions are in millimeters (mm) unless otherwise specified.

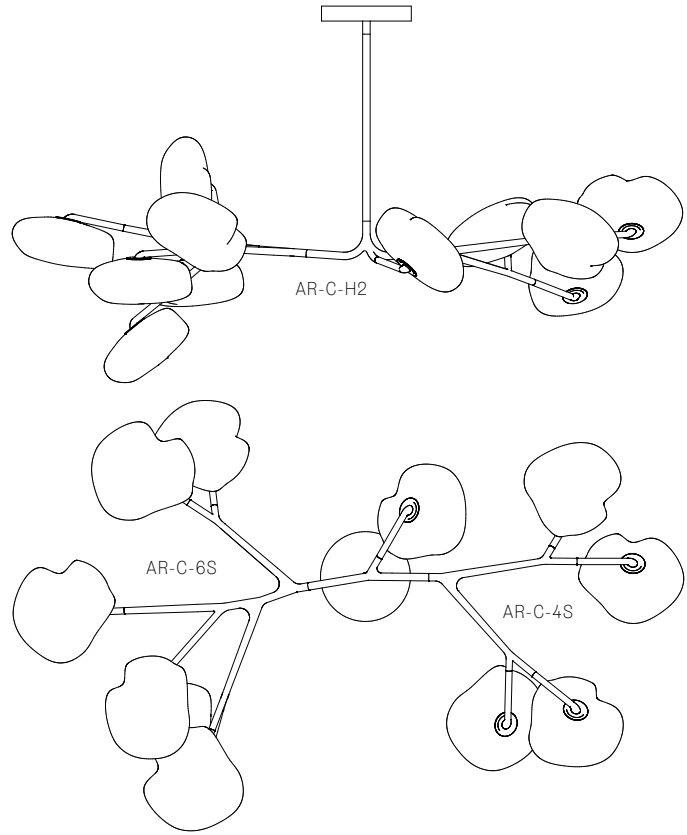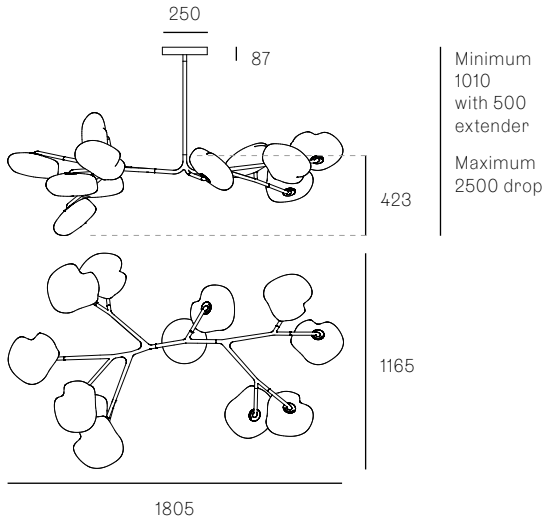


73.13A.1

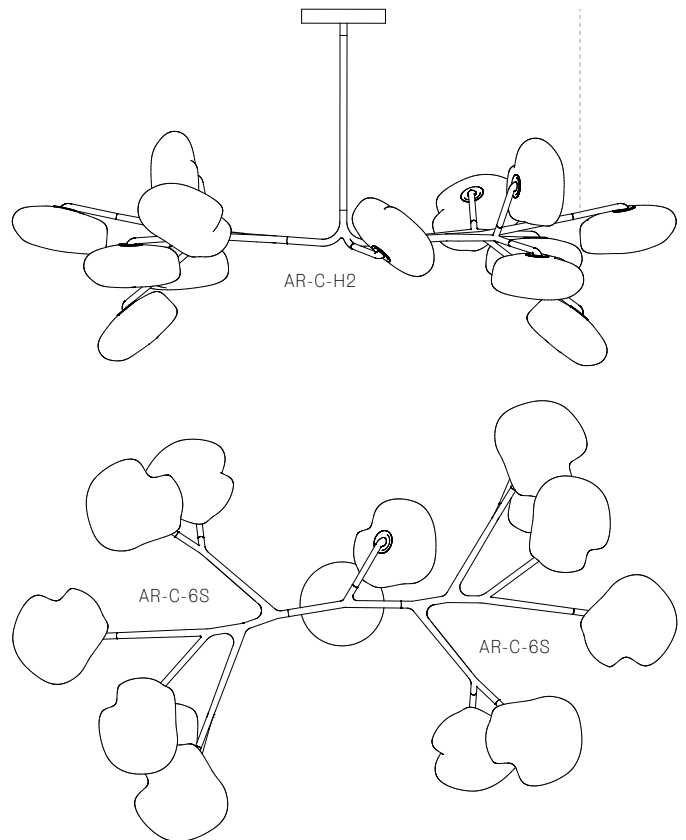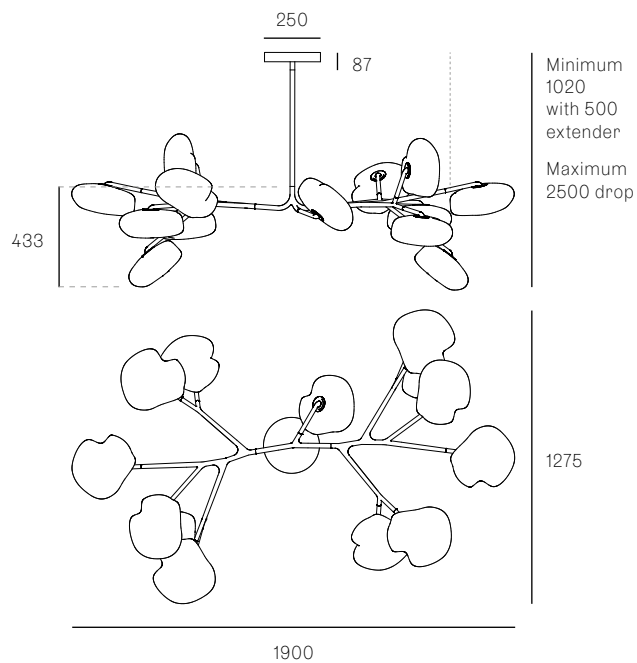


73.17A.1


All dimensions are in millimeters (mm) unless otherwise specified.

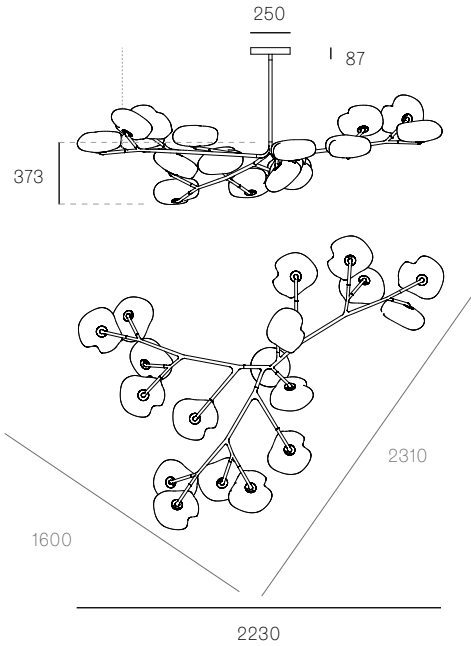


Minimum  
960 with  
500  
extender  
Maximum  
2500 drop

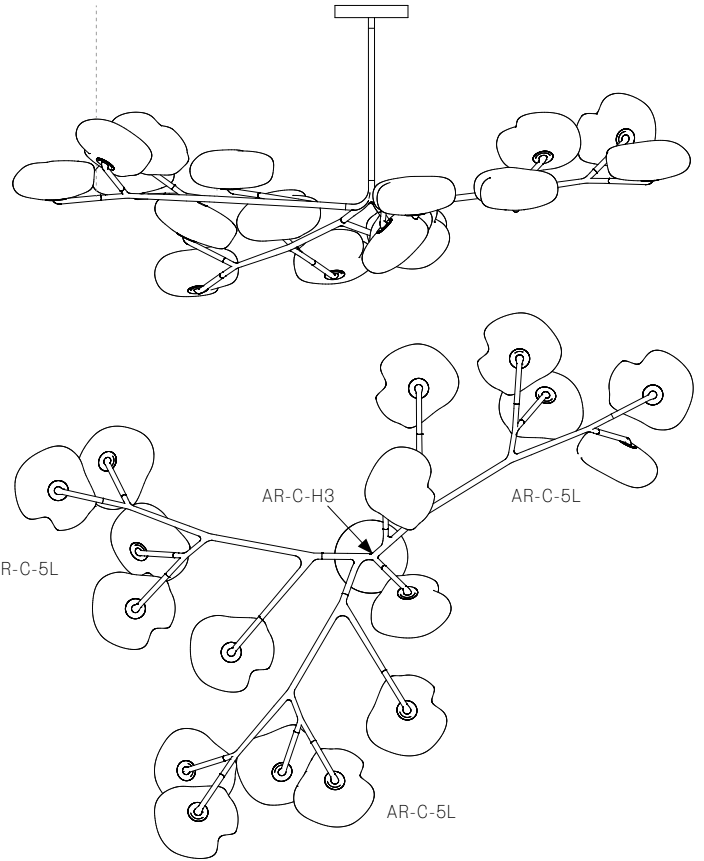

73.20A.1

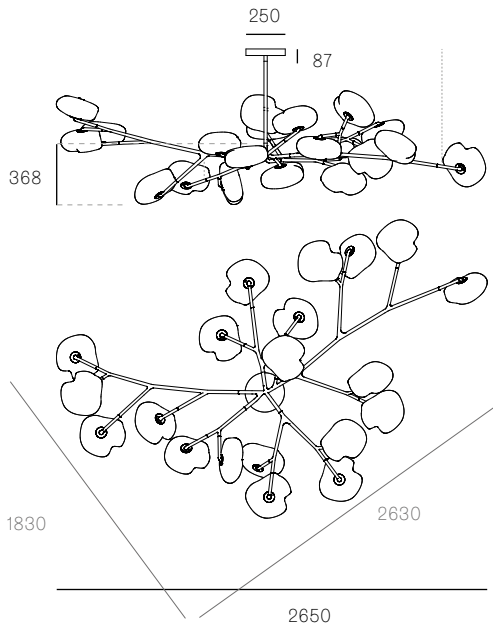


Minimum  
955 with  
500  
extender  
Maximum  
2500 drop

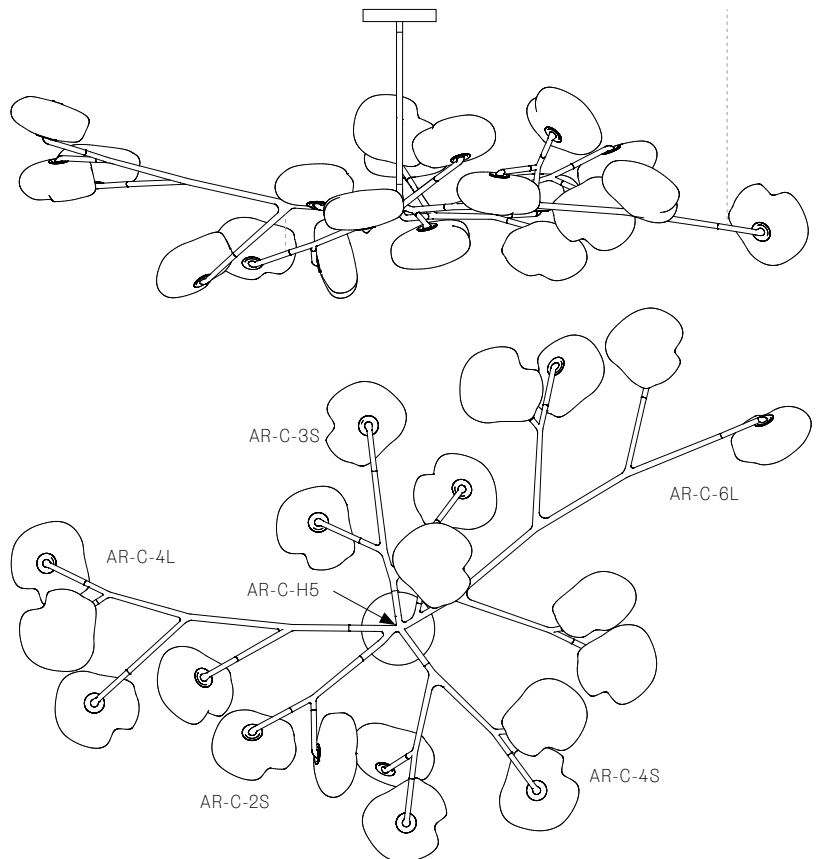


73.23A.1

All dimensions are in millimeters (mm) unless otherwise specified.

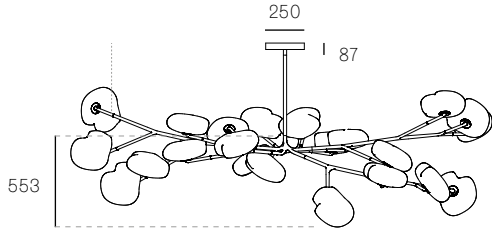


Minimum  
1140  
with 500  
extender  
Maximum  
2500 drop

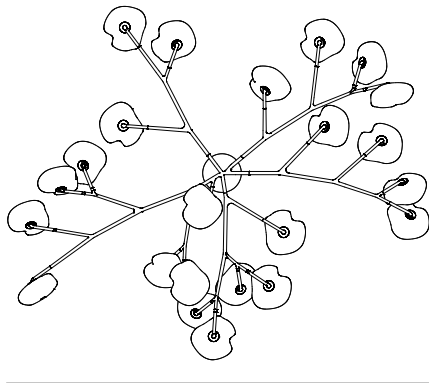


2290


2590

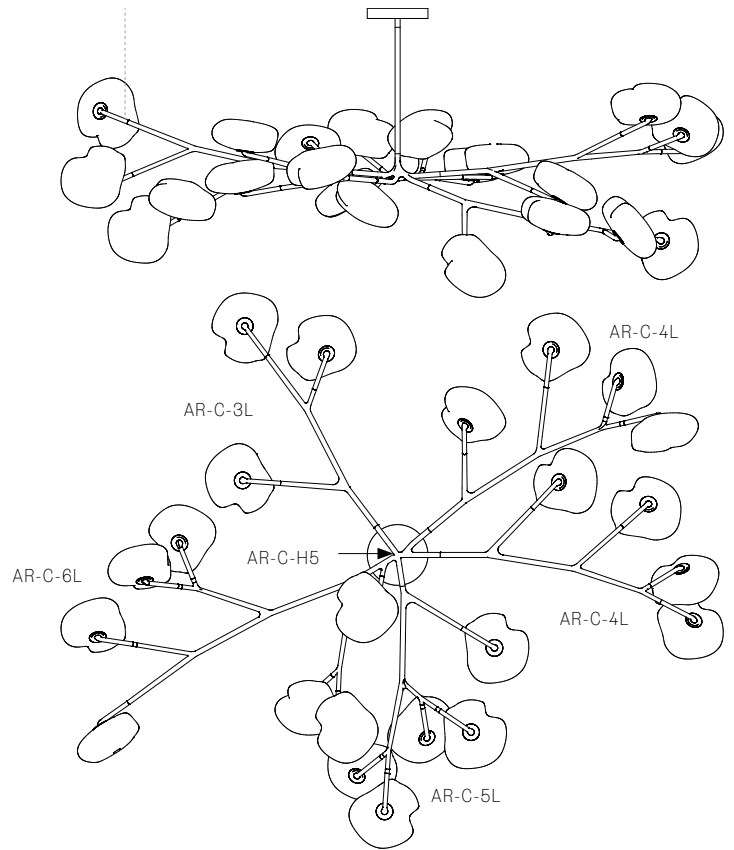

73.33A.1

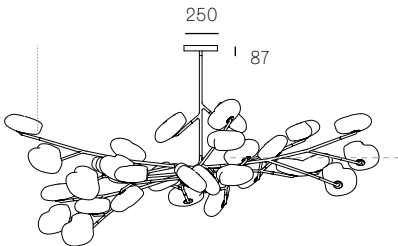

1500  
with 750  
extender  
Maximum  
2500 drop

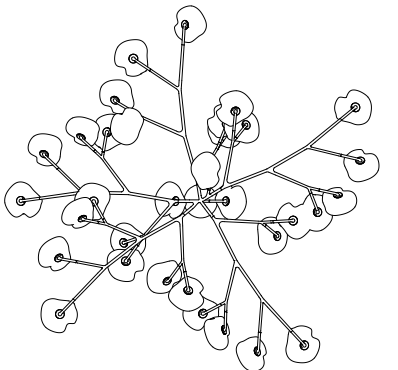

2600

2700

