











Image shown above 14.1 with round canopy




Ø102mm


Series	14
Mounting	Ceiling mounted
Glass Colours	Clear, grey, sepia
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available) 10W Xenon, 2600K, 81lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 14.1 - 14.9 Non-adjustable length: 14.11 - 14.50
Canopy Finishes	14.1 - 14.7: white, black or brushed nickel canopy 14.1m: white, black, brushed nickel, or brushed brass canopy 14.9 - 14.50: white canopy
Materials	Cast glass, blown borosilicate glass, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 14.1m  Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Registration	© 14 Series product design protected as U.S. Reg. No. 7,129,209
Certifications	<div></div>

Weight (kg)			
			
Round		Square	
14.1	2	14.11	30
14.3	5.5	14.16	40.5
14.5	9.5	14.26	63.5
14.7	14	14.36	87
14.11	30	14.50	109.6
14.14	37		
14.20	51		Rectangle
14.26	61.5		
14.36	83.5		
		14.9	25.9
		14.11	30
		14.14	36.5
		14.16	41.4
		14.20	63
		14.26	74
		14.36	83.5

ADJUSTABLE LENGTH

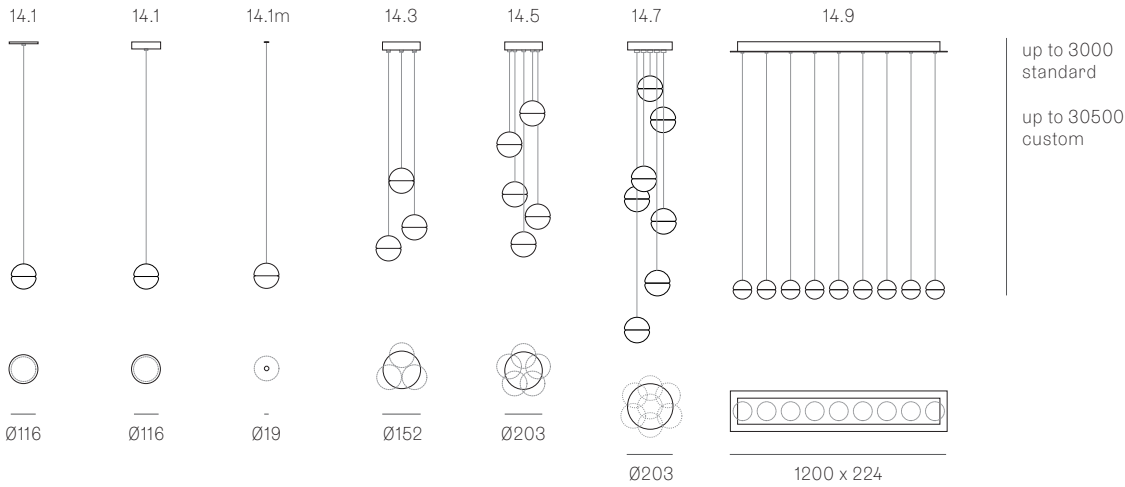

NON-ADJUSTABLE LENGTH

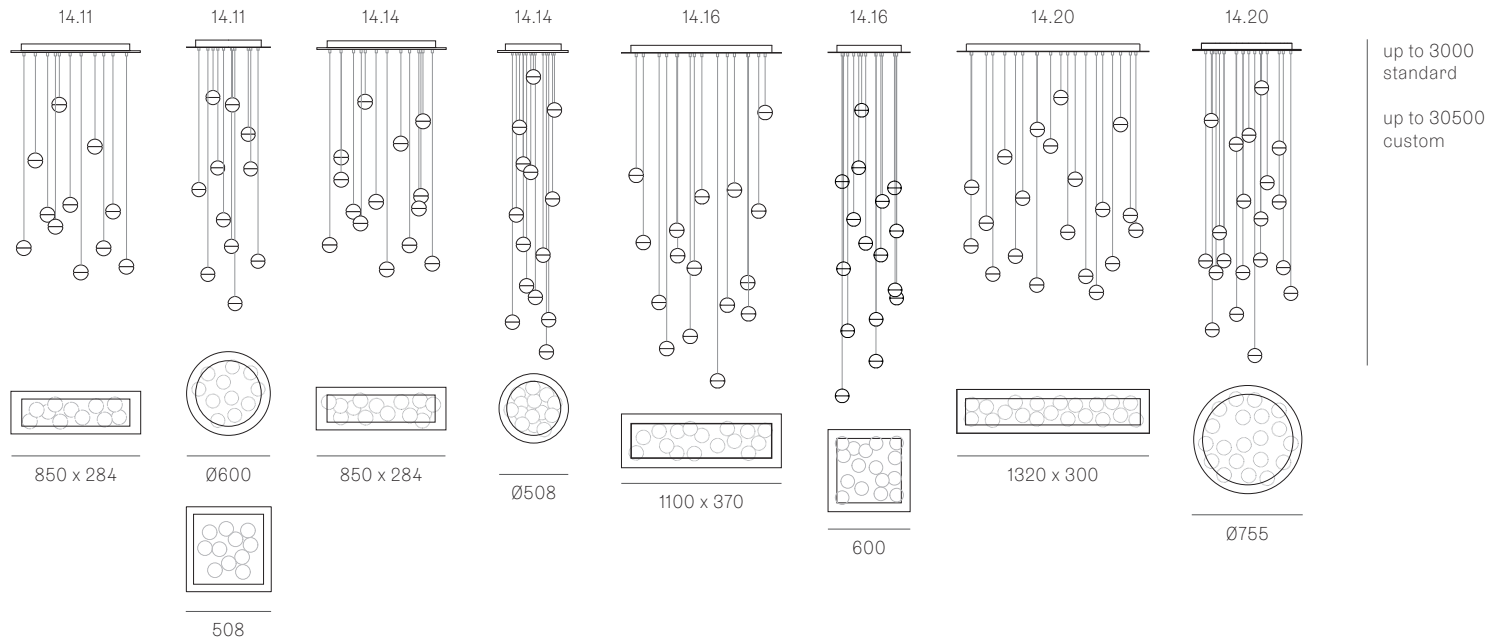


All dimensions are in millimeters (mm) unless otherwise specified.

**Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:**

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.

NON-ADJUSTABLE LENGTH

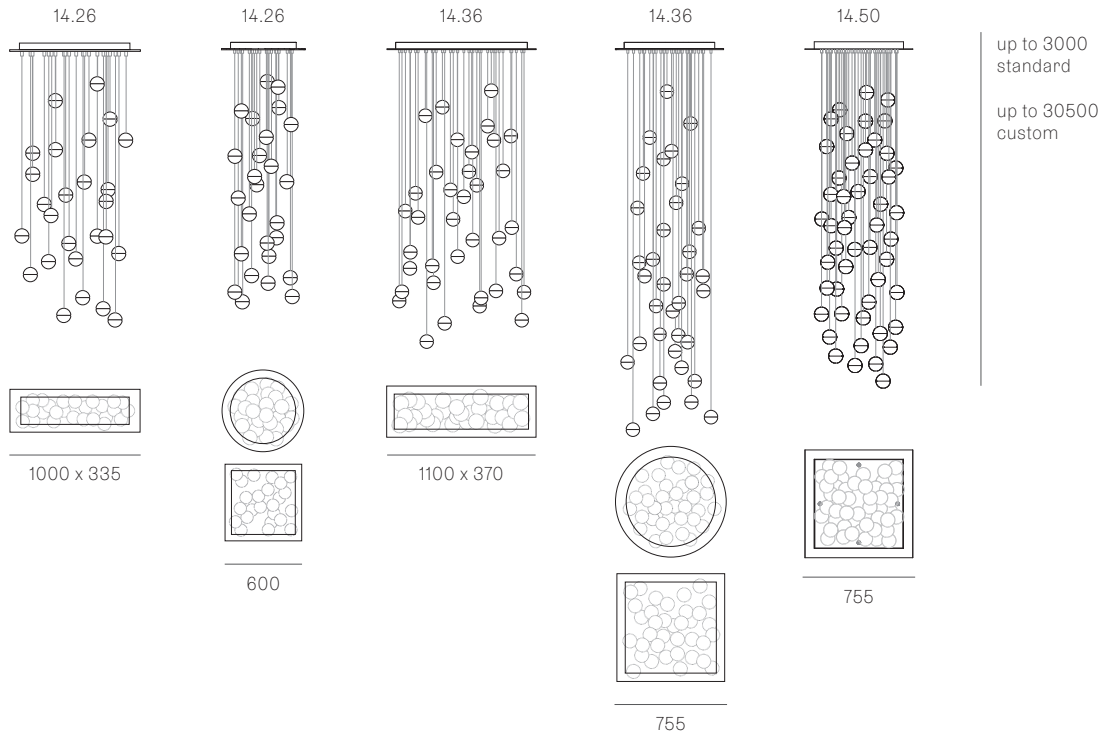

All dimensions are in millimeters (mm)  
unless otherwise specified.