

± Ø165mm

Image shown above 28.5 with round canopy

Series	28
Mounting	Ceiling mounted
Glass Colours	Clear, colour pendants
Lamp	1W LED, 2700K, 100lm 20W Xenon, 2600K, 196lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 28.1 - 28.9 Non-adjustable length: 28.11 - 28.28
Canopy Finishes	28.1 - 28.7: white, black or brushed nickel canopy 28.1mi/mo: white polyurethane canopy 28.9 - 28.28: white canopy
Materials	Blown glass, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 28.1m/mo/mi  Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	CAN 134238 US D687,740 EU 001695834-001 to 004

Certifications



Weight (kg)



Round

28.1	1.3
28.3	3.5
28.5	6
28.7	8
28.11	29
28.20	52



Square


28.11	29
28.16	39.5
28.28	65




Rectangle

28.9	16
28.11	28
28.16	38
28.20	52
28.28	66.8


ADJUSTABLE LENGTH

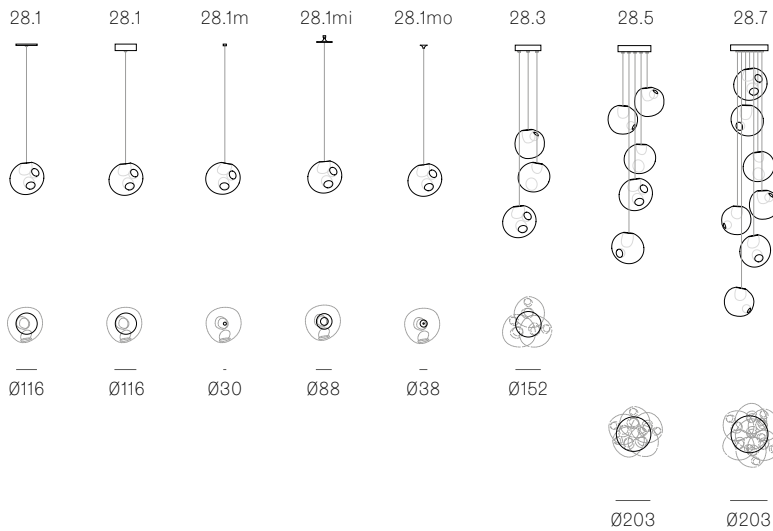

NON-ADJUSTABLE LENGTH

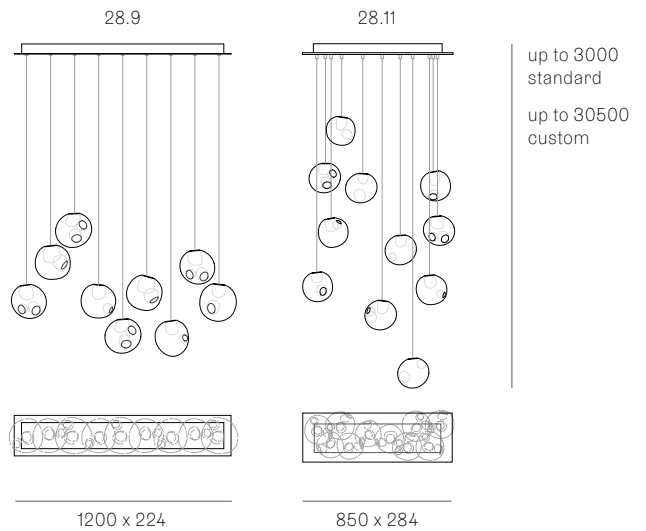

NON-ADJUSTABLE LENGTH

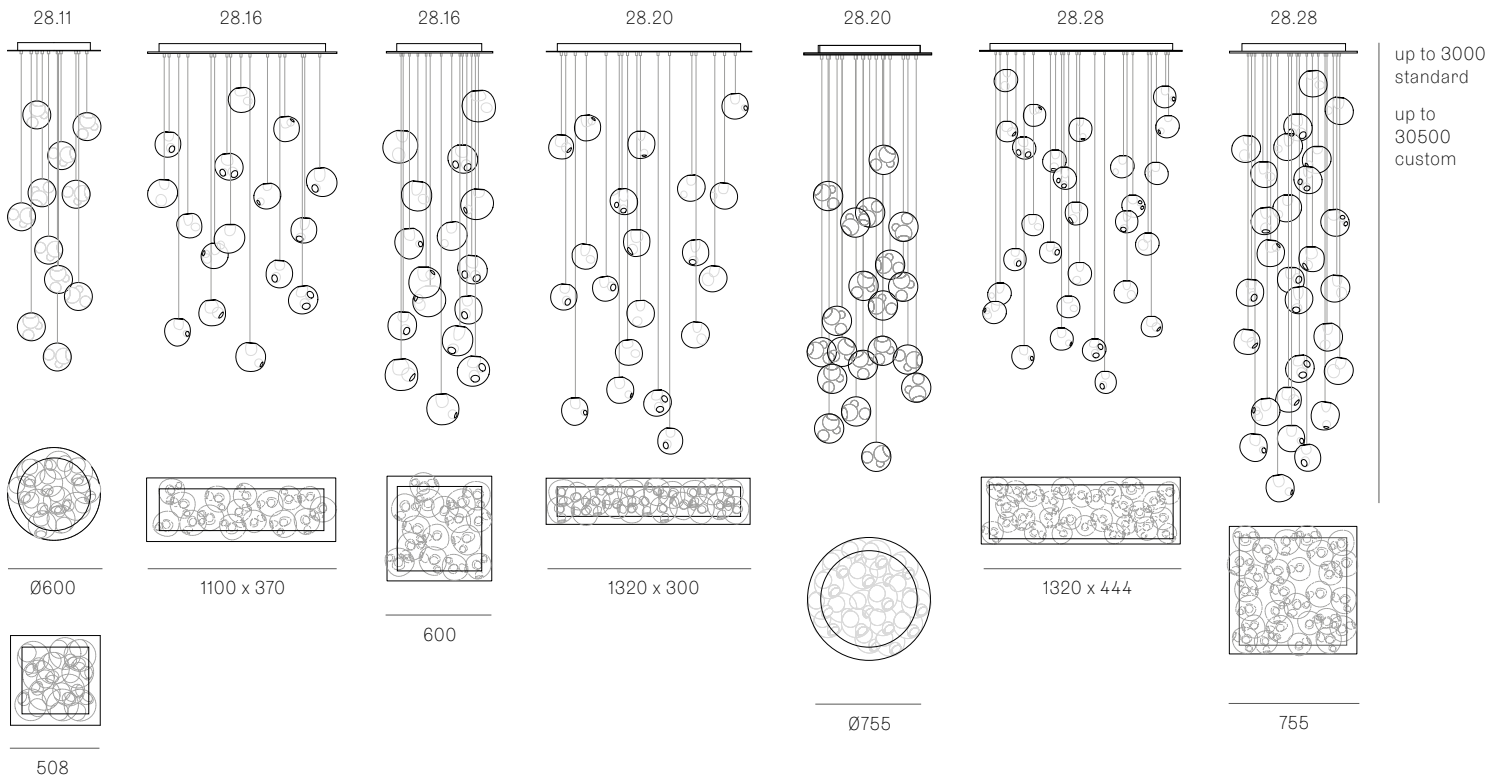

All dimensions are in millimeters (mm) unless otherwise specified.

**Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:**

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.