



Image shown above 28.5 with round canopy

Series

Mounting Ceiling mounted **Glass Colours** Clear, colour pendants

Lamp 1W LED, 2700K, 100lm (2500K and 3000K options available)

20W Xenon, 2600K, 196lm

 $3000 mm \ standard \ / \ up \ to \ 30500 mm \ maximum$ Coaxial Length

Adjustable length: 28.1 - 28.9 Non-adjustable length: 28.11 - 28.28

Canopy Finishes 28.1 - 28.7: white, black or brushed nickel canopy

28.1m: white, black, brushed nickel, or brushed brass canopy

28.9 - 28.28: white canopy

Materials Blown glass, braided metal coaxial cable, electrical

components, steel canopy

Power Supply

Remote mounted for 28.1m

Bocci recommends remote mounting power supplies for ease

of long-term maintenance.

Environment Indoor, dry location. IP30

Every single Bocci product is handmade. Each one is variously

blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are

individual, irregular expressions of our research.

Patent # CAN 134238

US D687,740

EU 001695834-001 to 004

Certifications





Weight (kg)



Round

28.1	1.3
28.3	3.5
28.5	6
28.7	8
28.11	29
28.20	52

Square


28.11	29
28.16	39.5
28.28	65

Rectangle


28.9 16 28.11 28 28.16 38 28.20 52 28.28 66.8




ADJUSTABLE LENGTH

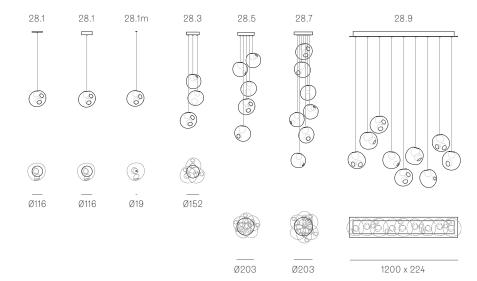

NON-ADJUSTABLE LENGTH



NON-ADJUSTABLE LENGTH

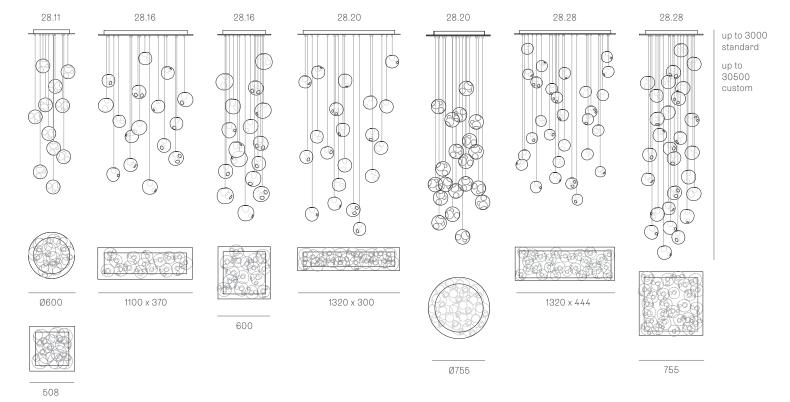

All dimensions are in millimeters (mm) unless otherwise specified.

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- $\label{eq:multiple single pendant fixtures should be wired in parallel. DO NOT wire$
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in $% \left(1\right) =\left(1\right) \left(1\right) \left$ order to avoid voltage drop, are the responsibility of the installing party.