

Image shown above 28.3 with round canopy

Series	28
Mounting	Ceiling mounted
Glass Colours	Clear, colour pendants
Lamp	1W LED, 2700K, 100Im (2500K and 3000K options available) 20W Xenon, 2600K, 196Im
Sculptural Cable	3000mm standard / up to 30500mm maximum Adjustable length: 28.1 - 28.7 Non-adjustable Length: 28.13 - 28.61
Cable Finishes	Black or nickel
Anchor Finishes	White, black, brass, brushed nickel
Canopy Finishes	28.1 - 28.7: white, black or brushed nickel canopy 28.1m: white, black, brushed nickel, or brushed brass canopy 28.13 - 28.61: white canopy
Materials	Blown glass, braided metal cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 28.1m
	Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Pendant anchor kit included.
	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	CAN 134238 US D687,740 EU 001695834-001 to 004
Certifications	

± Ø157 - 171mm


$\bigcirc$		
Round		
28.1	1.8	
28.3	4.3	
28.7	9.8	
28.13	22	
28.19	60.8	
28.37	112	
28.61	182	


Weight (kg)


## Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel, DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.


ADJUSTABLE LENGTH








28.3




28.7

up to 3000 standard up to 30500 custom

## NON-ADJUSTABLE LENGTH








Ì

O



Ø600

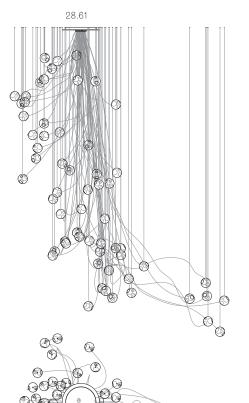

C

Ge

Q

۲

Ċ  $\odot$ 

> Ø707 Ċ

Q ÇÇ

Ò

0

 $\bigcirc$ 

up to 3000 standard up to 30500 custom

All dimensions are in millimeters (mm) unless otherwise specified.