

Image shown above 73.3V with round canopy

Series	73V
Mounting	Ceiling mounted
Glass Colours	Clear, grey 1, purple 1, blue 1, opaque white 1, opaque green 1, opaque blue 1
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available) 10W Xenon, 2600K, 81lm
Sculptural Cable	3000mm standard / up to 30500mm maximum Adjustable length: 73.1V - 73.7V Non-adjustable Length: 73.13V - 73.61V
Cable Finishes	Black or nickel
Anchor Finishes	White, black, brass, brushed nickel
Canopy Finishes	73.1V - 73.7V: white, black or brushed nickel canopy 73.1Vm: white, black, brushed nickel, or brushed brass canopy 73.13V - 73.61V: white canopy
Material	Blown glass, braided metal cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 73.1Vm Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Pendant anchor kit included.

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

Patent #
US D946,197
EU 006365441-0001-0004

Certifications



Weight (kg)




Round


73.1V	1.7
73.3V	5
73.7V	12
73.13	28.5
73.19V	37
73.37V	68
73.61V	111

- Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:**
- Multiple single pendant fixtures should be wired in parallel, DO NOT wire in series.
 - Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
 - Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

ADJUSTABLE LENGTH

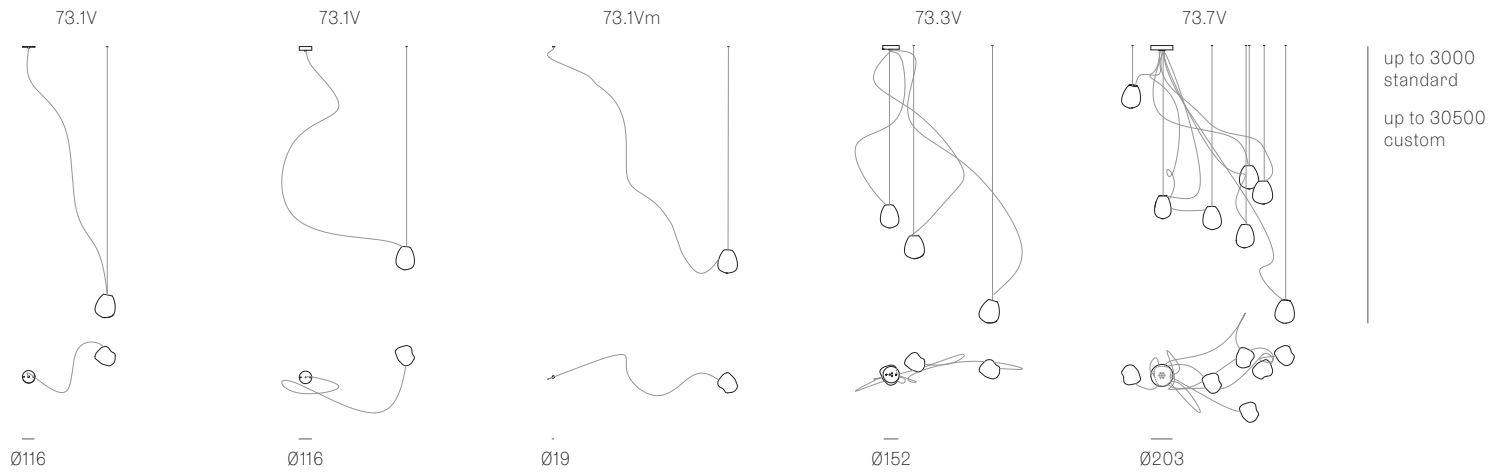

NON-ADJUSTABLE LENGTH

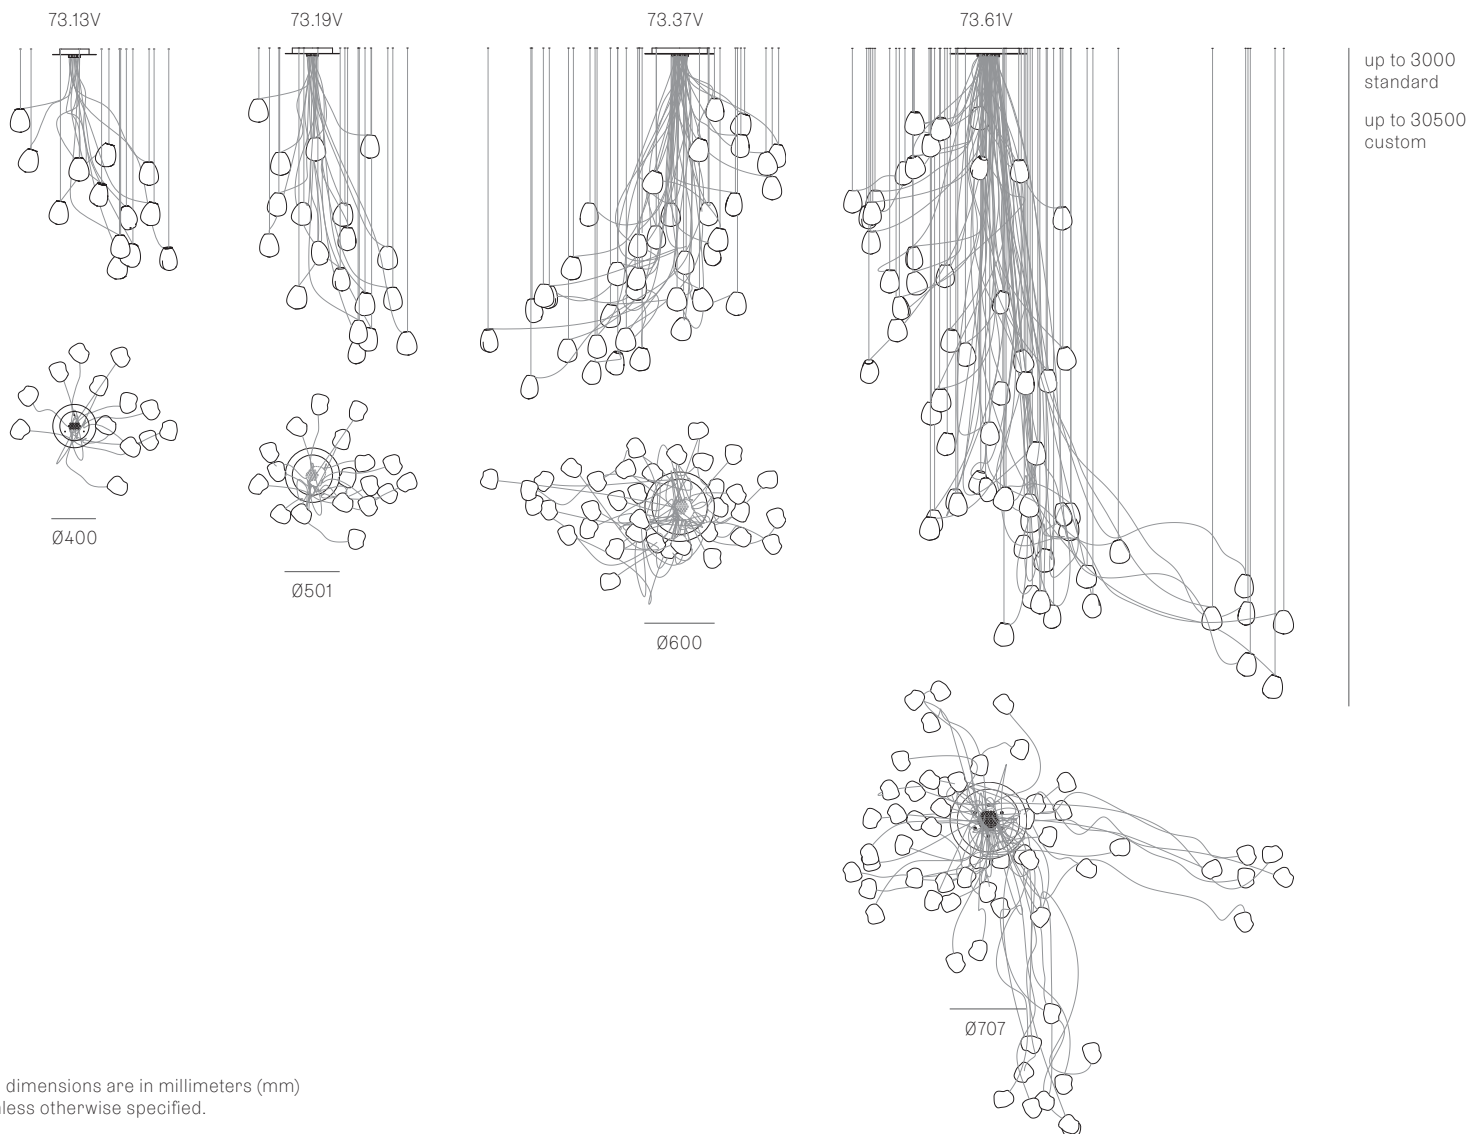

All dimensions are in millimeters (mm)
unless otherwise specified.