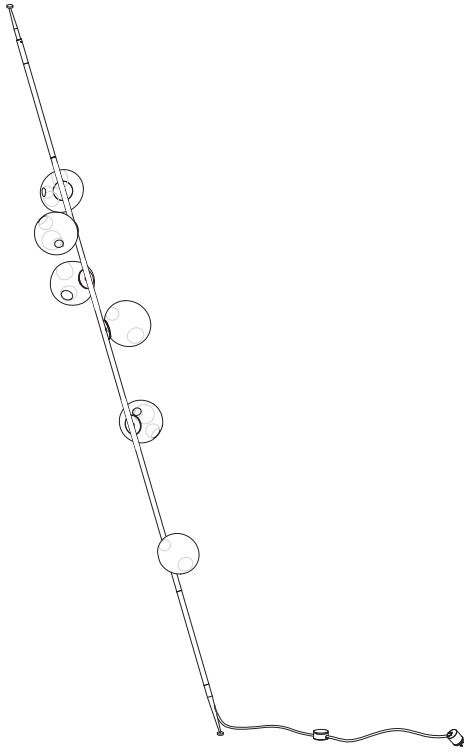

Image shown above 28.6 Column

Series	28, 38V, 57, 73, 84, 84V, 100, 118
Glass Colours	28: Clear, colour pendants 38V: Clear 57: Grey, white, light mirror, dark mirror 73: Clear, grey 1, grey 2, grey 3 84: Clear/copper 84V: Clear/copper 100: Clear, grey 118: White, bronze, grey, green
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available)
Plug Types	Type A - 110V Type C - 230V Type G - 230V Type I - 230V
Extenders	2 x 153mm and 2 x 305mm extenders included. Additional extenders available, sold separately.
Cable Length	2290mm black flexible cord
Finishes	Brass or black powder coated stem with matching dial control
Materials	Blown glass, brass stem, electrical components
Power Supply	Integral, dial control with build-in dimmer
Environment	Indoor, dry location. IP20
Note	The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

Patent #	28: US D687,740 EU 001695834-001 to 004 38V: EU 002071019-001 57: US D796732 EU 002268581-0001 to 0006 73: US D762,323 S EU 002633230-0001 - 0003 84: EU 003611144-0001 to 0004 100: US D1027 281S EU 008526131-0001 118: US 12,668,520 Worldwide patents pending
Certifications	CE UKCA UL MX NOM

Weight (kg)

	XXX.3	XXX.6
28	7	11
38V	10	16
57	8	12
73	10	17
84	9	14
84V	10	16
100	10	15
118	9.9	-

28



± Ø157 - 171

38V



± Ø190 - 215

57



± 100 - 150

73

± 120 - 150

± 230 - 380

84

± 130 - 150

± Ø130 - 150

84V

± 75 - 95

± Ø120 - 140

100



± 210 - 170

± 210 - 170

118



± Ø130 - 146

All dimensions are in millimeters (mm) unless otherwise specified.

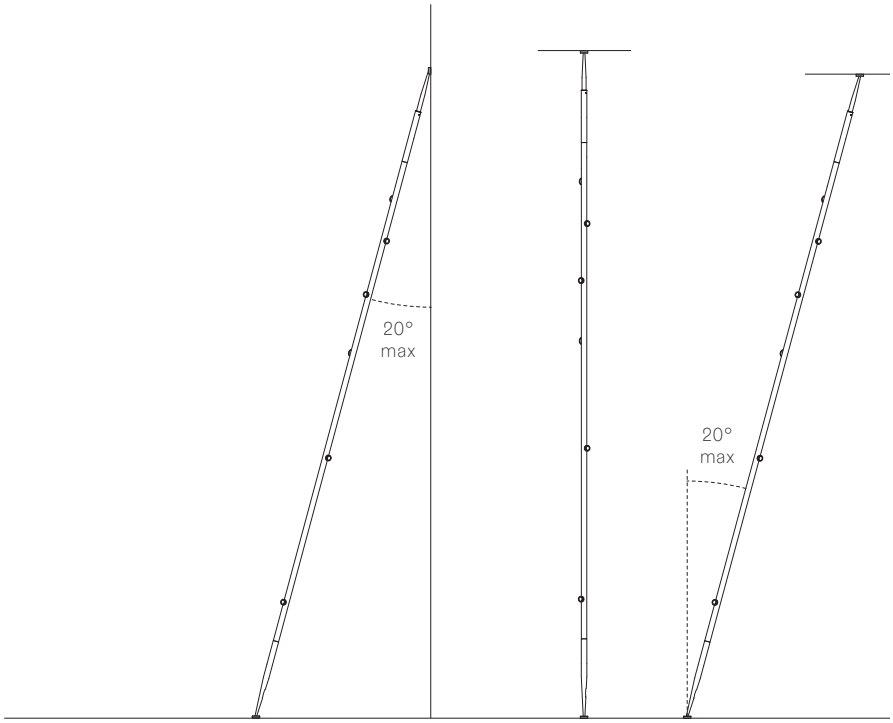

Short extender
153mm

Long extender
305mm

Extender	# of Extender	Min, Max Installed length
	0	2423 min 2495 max
	1 x short	2576 min 2648 max
	1 x long	1801 min 2729 max
	1 x short 1 x long	2881 min 2953 max
	2 x long	3033 min 3105 max
	1 x short 2 x long	3186 min 3258 max
	3 x long	3338 min 3410 max
	1 x short 3 x long	3491 min 3563 max
	4 x long	3643 min 3715 max

This diagram is meant to illustrate some the extender combinations for the columnar stem fixtures.

Each column comes with 2 short extenders and 2 long extenders.

Maximum 2 extenders per end for 28, 57, 73, 84, 84V and 100.

Maximum 1 extender per end for 38V and 118.

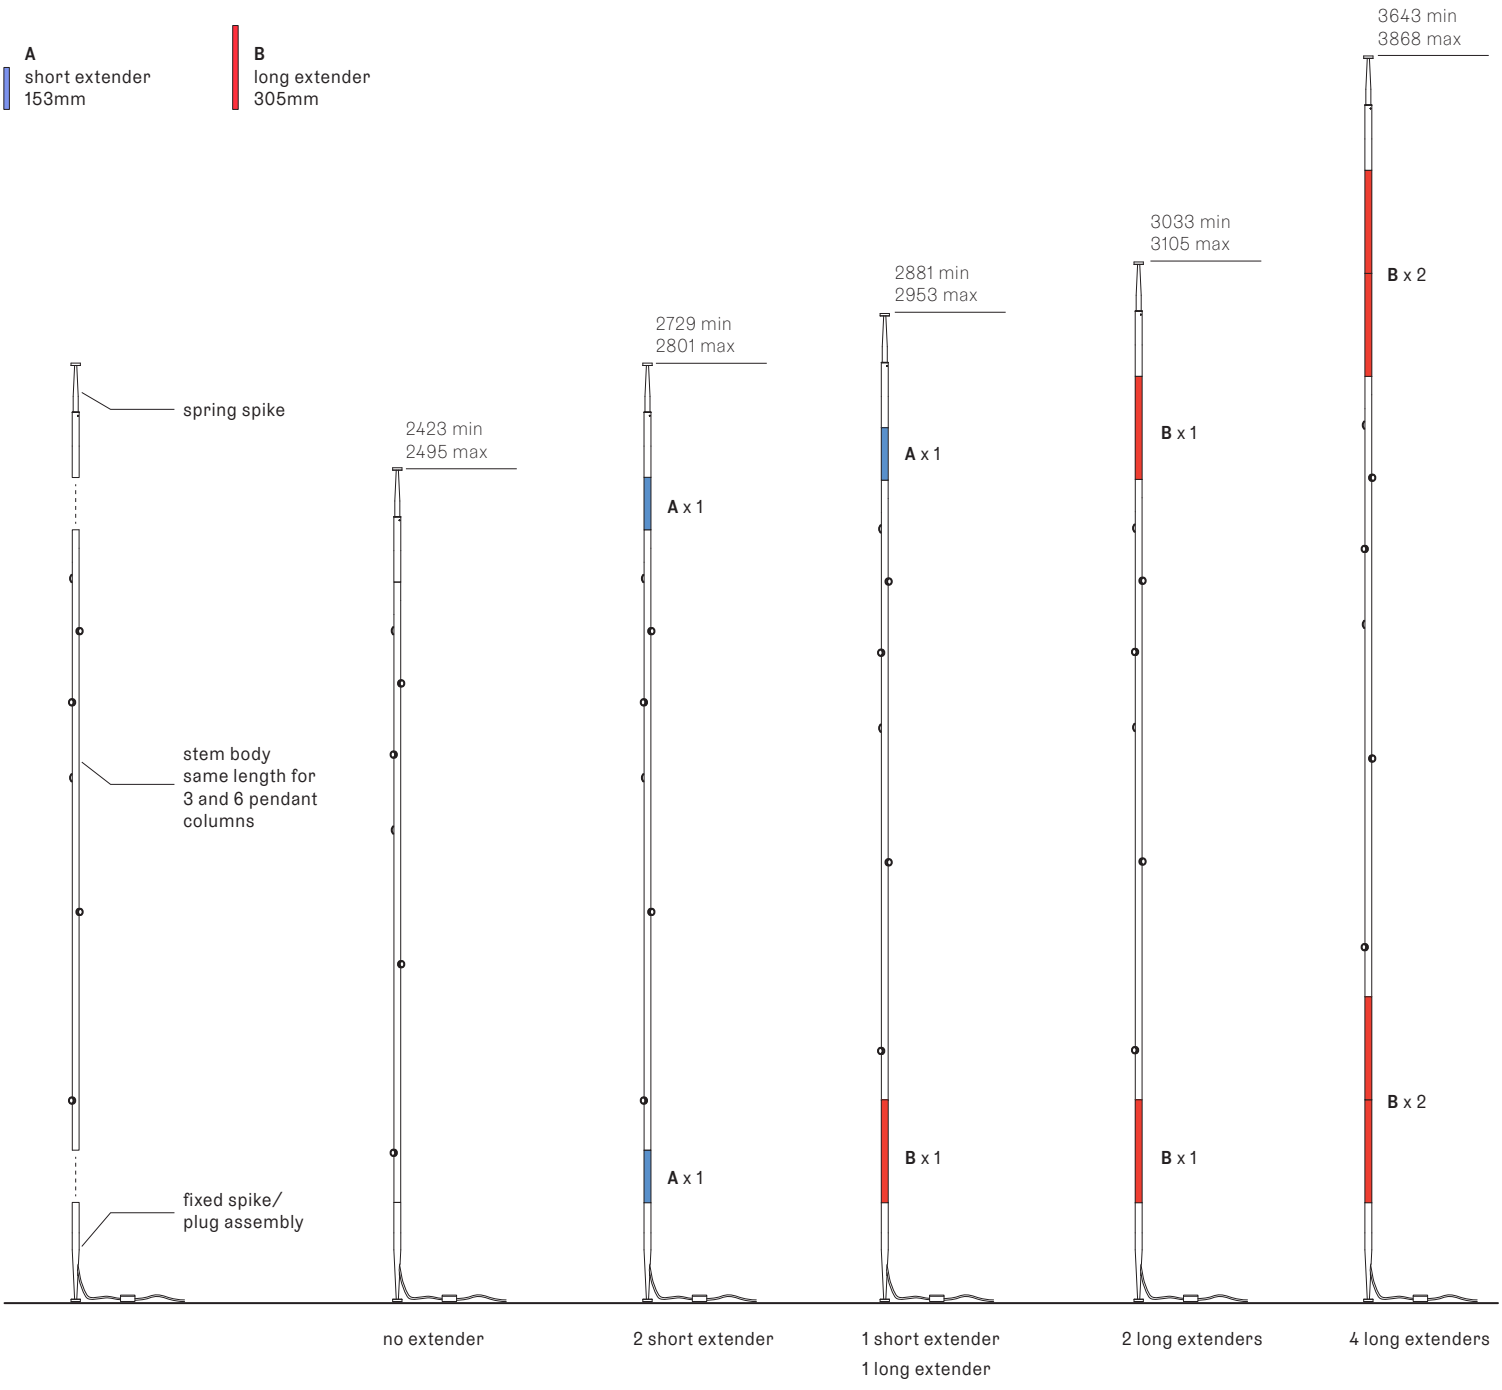

All dimensions are in millimeters (mm) unless otherwise specified.