

Image shown above 100.19 with round canopy

± 210 - 170mm

| | |
|------------------|---|
| Series | 100 |
| Mounting | Ceiling mounted |
| Glass Colours | Frosted clear, frosted grey |
| Lamp | 1W LED, 2700K, 100lm (2500K and 3000K options available) |
| Sculptural Cable | 3000mm standard / up to 30500mm maximum Adjustable length: 100.1 - 100.7 Non-adjustable Length: 100.13 - 100.61 |
| Cable Finishes | Black or nickel |
| Canopy Finishes | 100.1 - 100.7: white, black or brushed nickel canopy 100.13 - 100.61: white canopy |
| Material | Blown glass, braided metal cable, electrical components, steel canopy |
| Power Supply | Integral Remote mounted for 100.1m Bocci recommends remote mounting power supplies for ease of long-term maintenance. |
| Environment | Indoor, dry location. IP30 |
| Note | Pendant anchor kit included. |

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

| | |
|----------|------------------------------------|
| Patent # | US D1027 281S EU 008526131-0001 |
|----------|------------------------------------|

Certifications



Weight (kg)




Round


| | |
|--------|-------|
| 100.1 | 3.5 |
| 100.3 | 10.8 |
| 100.7 | 24.4 |
| 100.13 | 50.1 |
| 100.19 | 76.6 |
| 100.37 | 126.5 |
| 100.61 | 220.5 |

- Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:**
- Multiple single pendant fixtures should be wired in parallel, DO NOT wire in series.
 - Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
 - Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

ADJUSTABLE LENGTH

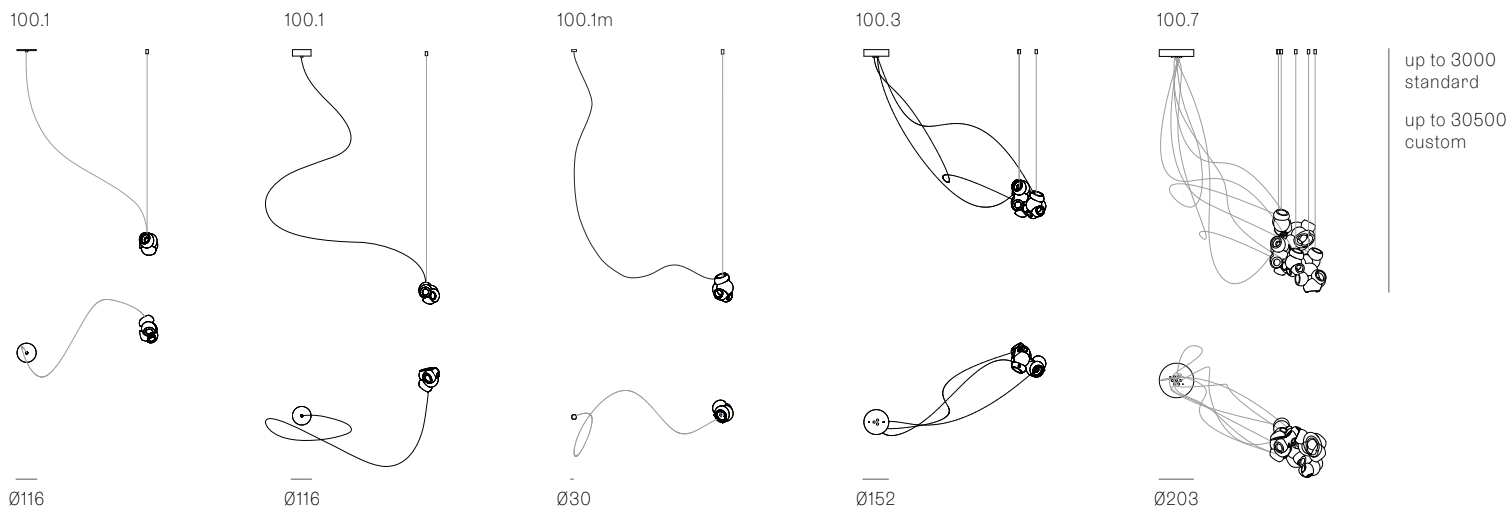

NON-ADJUSTABLE LENGTH

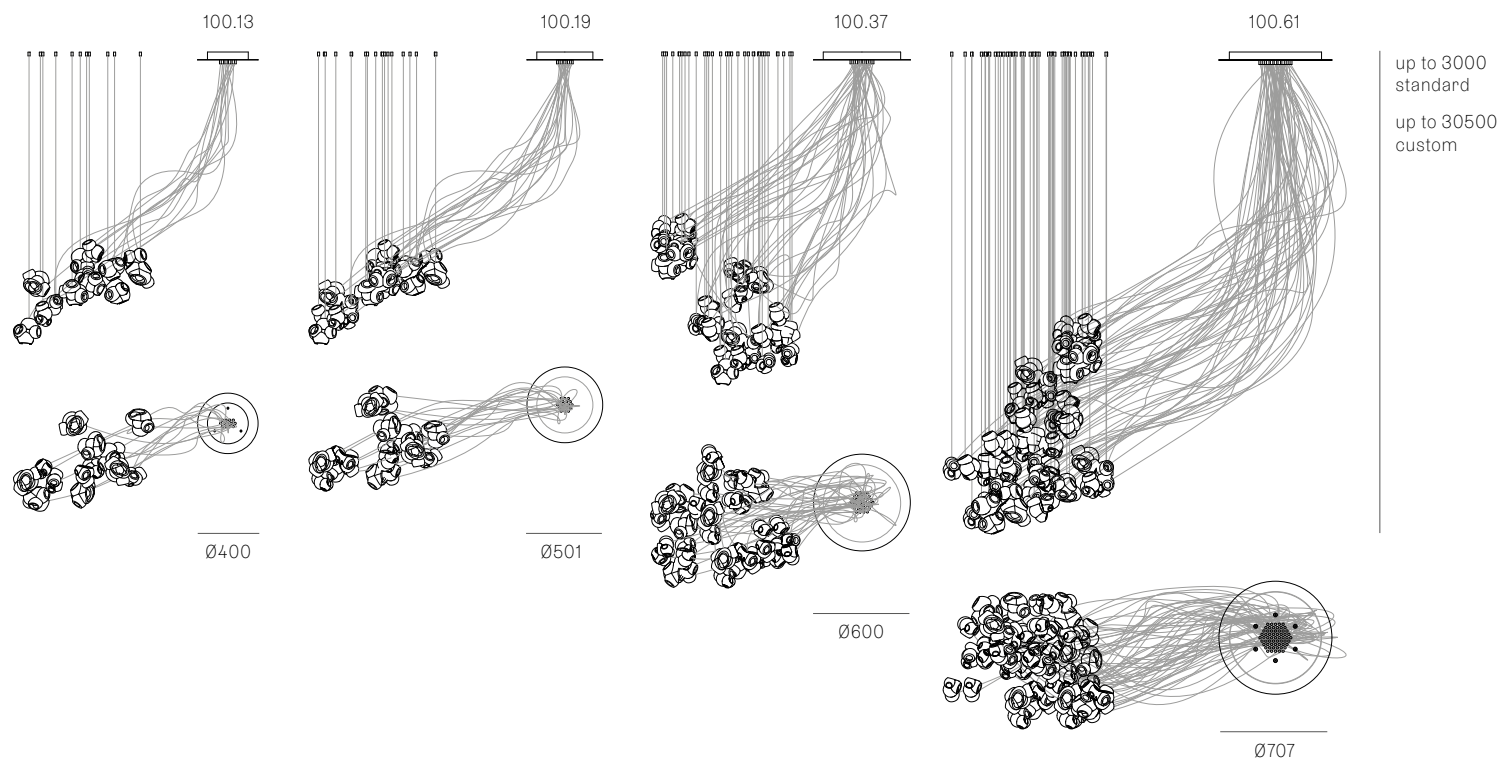

All dimensions are in millimeters (mm)
unless otherwise specified.