



Image shown above 100.16 with square canopy

± 210 - 170mm

Series	100

Mounting Ceiling mounted

Glass Colours Clear, grey, pink

Lamp 1W LED, 2700K, 100lm (2500K and 3000K options available)

 $\textbf{Coaxial Length} \hspace{1.5cm} 3000 \text{mm standard / up to } 30500 \text{mm maximum}$

Adjustable length: 100.1 - 100.7

Non-adjustable Length: 100.11 - 100.28

Canopy Finishes 100.1 - 100.7: white, black or brushed nickel canopy

100.1m: white, black, brushed nickel, or brushed brass canopy

100.11 - 100.28: white canopy

Materials Blown glass, copper mesh, braided metal coaxial cable,

electrical components, steel canopy

Power Supply Integral

Remote mounted for 100.1m

Bocci recommends remote mounting power supplies for ease

of long-term maintenance.

Environment Indoor, dry location. IP30

Note Every single Bocci product is handmade. Each one is variously

blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are

 $individual, irregular\ expressions\ of\ our\ research.$

Patent # US D1027 281S

EU 008526131-0001

Certifications



Weight (kg)



Round

100.1	2.8
100.3	7.7
100.5	12.1
100.7	17.2
100.11	38
100.20	64.8



Square

100.11	38.1
100.16	53
100.28	87




Rectangle


100.11	37.6
100.16	54.2
100.20	64.4
100.28	87.9



ADJUSTABLE LENGTH

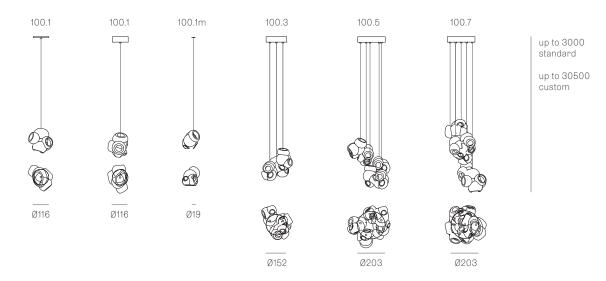

NON-ADJUSTABLE LENGTH

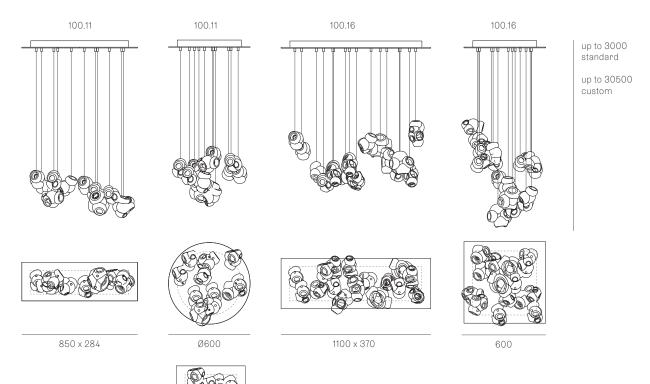

All dimensions are in millimeters (mm) unless otherwise specified.



508

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.


up to 3000 standard

up to 30500 custom



NON-ADJUSTABLE LENGTH

1320 x 300

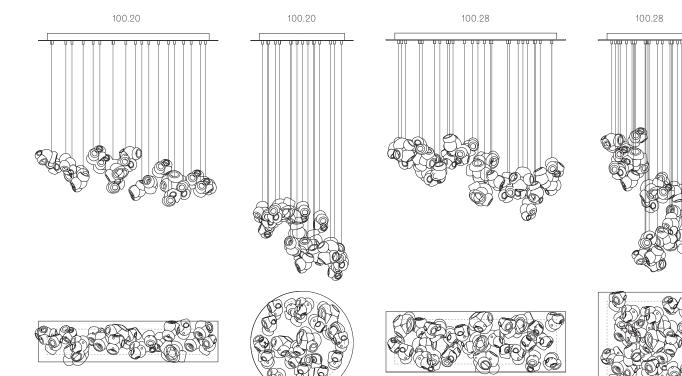

Ø755

1320 x 444

755

All dimensions are in millimeters (mm) unless otherwise specified.