




Image shown above 73.16V with rectangular canopy


Series	73V
Mounting	Ceiling mounted
Glass Colours	Clear, grey 1, purple 1, blue 1, opaque white 1, opaque green 1, opaque blue 1
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available) 10W Xenon, 2600K, 81lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 73.1V - 73.7V Non-adjustable Length: 73.11V - 73.28V
Canopy Finishes	73.1V - 73.7V: white, black or brushed nickel canopy 73.1Vm: white, black, brushed nickel, or brushed brass canopy 73.11V - 73.28V: white canopy
Materials	Blown glass, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 73.1Vm Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US D946,197 EU 006365441-0001-0004

Certifications




Weight (kg)			
			
Round		Rectangle	
73.1V	1.7	73.11V	26
73.3V	5	73.16V	39
73.5V	8	73.20V	45
73.7V	12	73.28V	63
			
Square			
73.11V	26		
73.16V	37		
73.28V	63		

ADJUSTABLE LENGTH

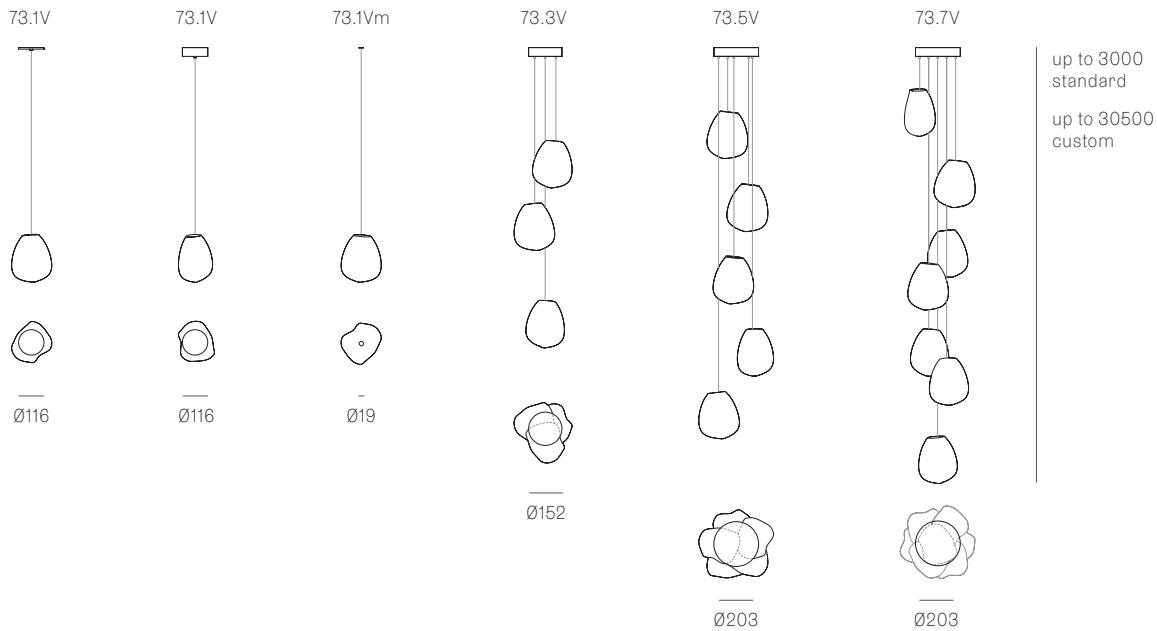

NON-ADJUSTABLE LENGTH

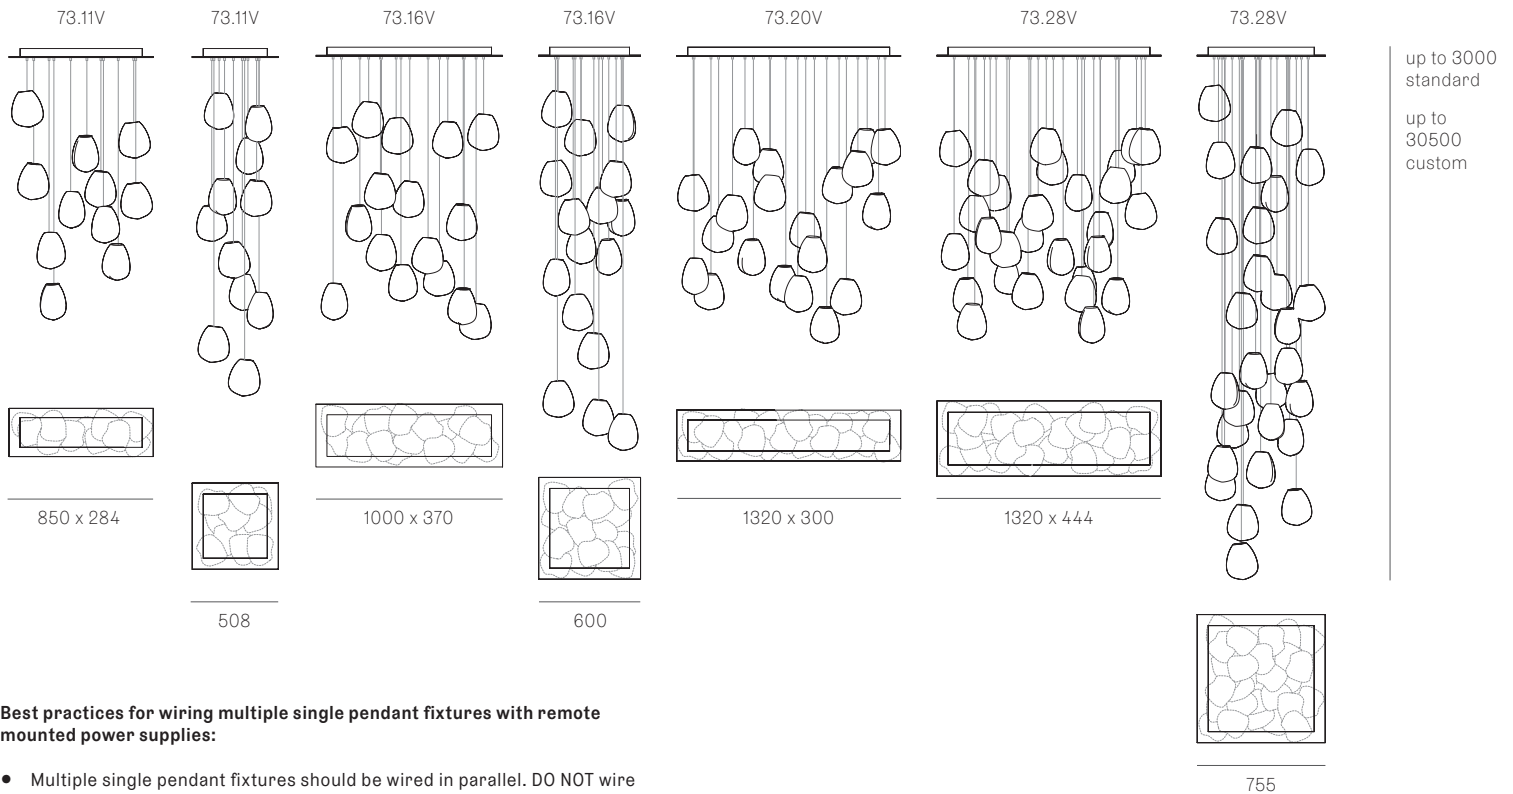

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.