

TA60WD12LEDS
Low Voltage Electronic Power Supply



| | |
|--------------|----------------------|
| Efficiency | >85% |
| Power Factor | >0.95 |
| Case TC | 90°C Max. |
| Protection | Input / Output |
| Storage | -30°C / +90°C |
| Humidity | 95% RH Max. |
| IP Rating | IP 65 |
| Class | Class 2 Power Supply |
| Dimming | ELV Dimmable |



FEATURES


- No load technology, works with both Halogen & LED DC loads
- Isolated output power per NEC and UL safety requirements
- UL recognized/listed Class 2 power supply, meet UL 2108 requirements
- Auto-reset; Short circuit, Overload and Thermal protection
- Soft start
- ELV Dimmable 0% - 100%
- Low profile, small compact design to fit in most enclosures

MODEL SPECIFICATIONS

| Model Number | Input Voltage | Wattage | Input Current | Output Voltage | Load Type |
|--------------|-----------------|---------|---------------|----------------|---|
| TA60WD12LEDS | 120V AC 50/60Hz | 60W | 0.5A | 12V DC | LED Strips, LED Bulbs, Incandescent & Halogen Bulbs |

MECHANICAL SPECS

| FORM FACTOR | DIMENSIONS |
|-------------|------------------|
| B5 | 67.5 x 33 x 21mm |

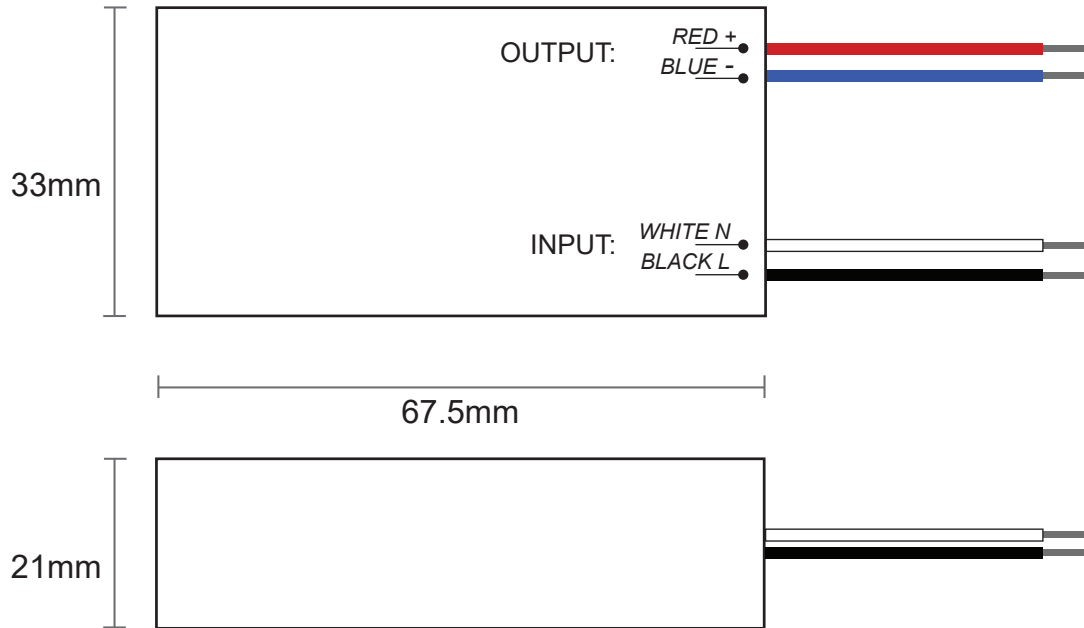

TU60WD12LEDS65B15

Low Voltage Electronic Power Supply



| | |
|--------------|----------------------|
| Efficiency | >85% |
| Power Factor | >0.95 |
| Case TC | 90°C Max. |
| Protection | Input / Output |
| Storage | -30°C / +90°C |
| Humidity | 95% RH Max. |
| IP Rating | IP 65 |
| Class | Class 2 Power Supply |
| Dimming | ELV Dimmable |



RoHS



FEATURES

- No load technology, works with both Halogen & LED DC loads
- Isolated output power per NEC and UL safety requirements
- UL recognized/listed Class 2 power supply, meet UL 2108 requirements
- Auto-reset; Short circuit, Overload and Thermal protection
- Soft start
- ELV Dimmable 0% - 100%
- Low profile, small compact design to fit in most enclosures

MODEL SPECIFICATIONS

| Model Number | Input Voltage | Wattage | Input Current | Output Voltage | Load Type |
|-------------------|-------------------------|---------|---------------|----------------|--|
| TU60WD12LEDS65B15 | 220V-240V AC 50/60Hz | 60W | 0.27A | 12V DC | LED Strips, LED Bulbs, Incandescent & Halogen Bulbs |

MECHANICAL SPECS

| FORM FACTOR | DIMENSIONS |
|-------------|------------------|
| MB2 | 78 x 40 x 22.1mm |

